11 Bayview Cir & 5001 Arrowhead Pt — largest home, private dock, first steps

Richland-Chambers Lake, Navarro County, Texas · feasibility check, due-diligence plan and e-mail drafts · 10 November 2026

312.16 ft lake 9 Nov 2026 | **14** e-mail drafts

Evidence: OFFICIAL official record · GIS lidar/GIS, not a survey · ESTIMATE this report's estimate · CONFIRM still to confirm with the named party. Elevations in ft above sea level (NAVD88). Lake 312.16 ft on 9 Nov 2026, 2.84 ft below full pool.

A · 11 Bayview Cir

White Rock Sub. Lot 11 · 0.65 ac · asking $89,900 · CAD $88,808 · MLS 21146775

Big home: yes. HOA sewer means no drip field, so only the set-backs, the wedge shape and Zone A limit the house: up to a 116×52 ft footprint, ≈9,424 sf heated on two storeys in theory. **Private dock: yes, up to 1,200 sf** in a basin about 98 ft across, shared with two neighbours' boathouses. **Main unknown: water depth.** TWDB never sounded the basin, so sound it before you buy. Also check the HOA sewer plant, which settled a TCEQ order for 2023–24 effluent violations.

B · 5001 Arrowhead Pt

Rustling Oaks Estates Ph II, Blk 1 Lot 33 · 0.50 ac · asking $99,900 · CAD $68,849 · MLS 21298338

Big home: yes, but the septic drip field sets the limit: ≈8,912–9,904 sf heated in theory. That is far above the 2,200–3,500 sf of Rustling Oaks' most valuable homes. **Private dock: yes, up to 918 sf.** Water is 6 ft deep at full pool and 3 ft today, 30 ft out from the bank (TWDB survey). Low holding cost ($144/yr dues), but the CC&Rs require the outside walls and roof to be finished within 120 days of starting, and they ban private wells.

Feasibility	A · 11 Bayview Cir (White Rock)	B · 5001 Arrowhead Pt (Rustling Oaks)
Largest home		
Largest footprint	116×52 ft = **6,032 sf** incl. 3-car garage ESTIMATE	112×56 ft = **6,272 sf** (drip 50 ft from pool) ESTIMATE
Heated, 2 storeys	**≈9,424 sf** (2½ storeys allowed: ≈11,780)	**≈8,912–9,904 sf** (75- or 50-ft drip set-back)
What limits it	set-backs on a wedge-shaped lot and Zone A; the 40% cover cap (11,326 sf) is not reached GIS	the drip field: 600 gal/day needs 6,000 sf of drip ESTIMATE
Sensible size	5,000–7,000 sf heated; White Rock homes median ≈$1.2M (CAD)	4,000–5,500 sf; the top Rustling Oaks homes are 2,200–3,500 sf
Minimum / rules	2,500 sf, site-built, ≥60% stone & glass (listing) CONFIRM; CC&Rs not online	1,600 sf; 5-ft side/rear; no wells; walls + roof done in 120 days OFFICIAL
Sewer	HOA plant, permit 8,000 gal/day; TCEQ order for 2023–24 violations OFFICIAL	aerobic unit + drip; TRWD permit $400; 1-acre rule n/a (1990 plat) OFFICIAL
Private dock		
TRWD size limit	**1,200 sf** (formula 1,230; above 1,200 sf needs 20 ft from side lines) OFFICIAL	**918 sf** (8 sf × 115 ft) OFFICIAL
Water in front	basin 60–110 ft across at 315 ft; 98 ft at the dock GIS	75–222 ft (channel + cove); 135 ft at the dock GIS
Dock that fits	56×21 ft at the shore; ≥65 ft passage left ESTIMATE	45×20 ft after a 10-ft walkway; 69 ft passage ESTIMATE
Depth over the lift	**unknown**: basin not surveyed (nearest TWDB point 219 ft away) CONFIRM	6.1 ft full pool · **3.2 ft today** · 1.6 ft at the Dec-2022 low GIS
Boathouses nearby	977 + 1,024 sf, both 2023, same basin OFFICIAL	seller's 936 sf at 5003 (2013) OFFICIAL
Money and risk		
Holding cost / yr	≈$4.9k: HOA $3,530 + tax $1,397	≈$1.1–1.7k: POA $144 + tax $972 now, ≈$1,540 after a sale
Spend before committing	≈$2.2–4.4k: survey + soundings	≈$3.0–5.9k: survey + septic evaluation
Biggest open question	basin depth; the HOA sewer plant's finances	the 120-day build rule; over-building; where the lot line meets the water

Bottom line

advice, not a guarantee

For the biggest house with a private boathouse, **Lot A is the stronger site if two things check out**: the basin is at least ≈5 ft deep at full pool where the boathouse would go (or TRWD allows dredging), and the HOA confirms a sewer tap with no large assessment coming. Its neighbours are $1M+ homes, so a large house fits the street. **Lot B has measured water** (≈6 ft at full pool, 30 ft out) and costs about $3.5k a year less to hold. But the drip field caps the house, anything much over 3,500 sf would out-build Rustling Oaks, and the CC&Rs want the shell finished within 120 days. Find out about A's depth and sewer first; they decide the choice.

Start here

costs and walk-away triggers: page 4

1. **This week, $0:** send the e-mails on pages 5–7; visit both lots while the lake is low and sound both dock spots with a marked pole.
2. **Pick one lot** once TRWD, the HOA/POA and the agents answer. Do not pay for surveys on both.
3. **Offer with a 21–30-day option** (fee $200–500). Spend on the survey, and the septic evaluation for B, only inside the option period.
4. **Before the option ends:** TRWD's dock answer in writing, plus the HOA sewer letter (A) or a passing septic evaluation (B).

Top alerts


- ! A: nobody has measured the basin depth; neighbours' boathouses already use part of the basin
- ! A: the HOA sewer plant broke its permit limits in 2023–24, and TCEQ deferred most of the penalty for inability to pay
- ! B: CC&Rs require outside walls and roof within 120 days of the start, and ban owner wells
- ! B: a house over ≈3,500 sf would be the largest in Rustling Oaks by far
- ! Both: the lake was below 312 ft on 27% of days since 2000; clay soil needs an engineered foundation

A · 11 Bayview Cir, Corsicana, TX

White Rock Sub. Lot 11 · 0.65 ac · CAD 63254 · MLS 21146775
owner: Jason Hamad (Dallas), bought 15 Jul 2022

$89,900	$88,808	≈9.4k sf	1,200 sf	?
asking	CAD 2026	max heated (theory)	max dock	depth at lift today

Evidence: OFFICIAL official record · GIS lidar/GIS, not a survey · ESTIMATE this report's estimate · CONFIRM still to confirm with the named party. Elevations in ft above sea level (NAVD88). Lake 312.16 ft on 9 Nov 2026, 2.84 ft below full pool.

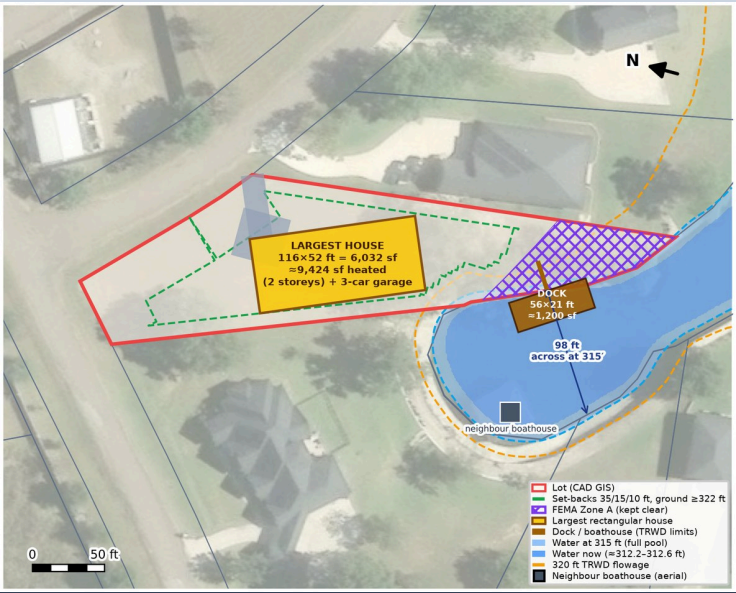


True-scale plan, rotated (arrow = true north): largest house, dock, water at full pool and today


Largest home: feasibility

test fit, not a design

Limit	building envelope: 35/15/10-ft set-backs, ground ≥322 ft, out of Zone A = **12,752 sf** GIS
Footprint	**116×52 ft = 6,032 sf** incl. 3-car garage and porches; 21% of the lot (cap 40% = 11,326 sf) ESTIMATE
Heated	**≈9,424 sf** on two storeys; ≈11,780 sf with a half-storey (zoning allows 2½) ESTIMATE
Rear half	1,421 of 10,390 sf used; the 50% limit is not reached GIS
Sensible	5,000–7,000 sf heated leaves room for a pool, parking and the view corridor; an L-shaped plan can use more of the wedge
Sewer	White Rock HOA plant (no septic). TCEQ design flow for this size ≈600 gal/day, 7.5% of the plant's 8,000 gal/day permit OFFICIAL
HOA rules	site-built, ≥2,500 sf, ≥60% stone & glass (listing) CONFIRM; height, water set-back, build-time and boathouse rules unknown CONFIRM
Zoning	likely SF-3 CONFIRM: front 35, rear 15, side 10 ft; ≤40% cover; 2½ storeys; county permit $0.25/sf
Zone A	3,621 sf (13%) of the lot along the water, kept clear OFFICIAL

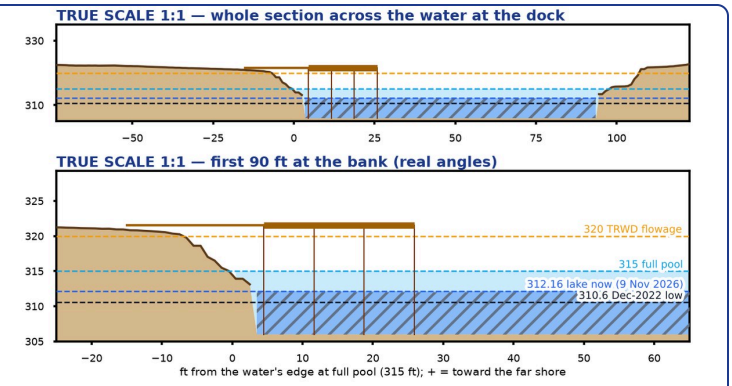

True scale 1:1 section through the dock, across the water

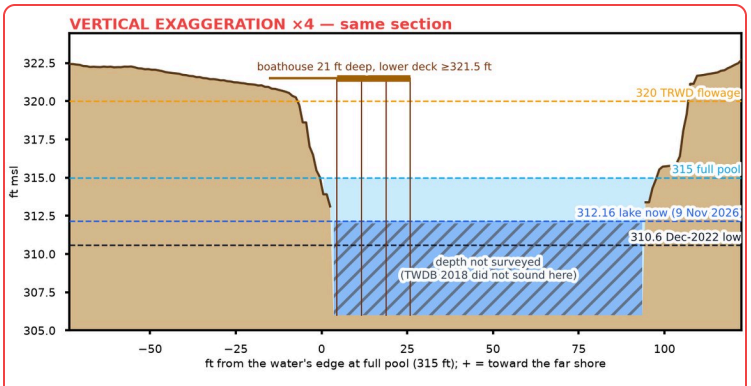

Same section, vertical exaggeration ×4 (heights stretched to show depth)

Private dock: feasibility

Size	TRWD: 8 sf/ft to 150 ft + 4 sf/ft above → 1,230 sf; keep ≤**1,200 sf** so the 5-ft side clearance applies (20 ft above 1,200) OFFICIAL
Water	the lot fronts a basin at the head of a channel, 60–110 ft across at 315 ft, 98 ft at the dock spot GIS
Fit	**56×21 ft = 1,200 sf** at the bulkhead; reach ≤⅓ of the width (≈26 ft); ≥65 ft left to the far shore or a neighbour ESTIMATE
Depth	**not surveyed**: TWDB 2018 soundings stop 219 ft away, where the bottom is 306.3 ft (8.7 ft at full pool, 5.9 ft today). Sound it CONFIRM
Neighbours	218 White Rock: 1,024-sf boathouse; 114 Bayview: 977 sf; both 2023 OFFICIAL
Wall	steel bulkhead, CAD 170 ft, 2015, 38% good; TRWD permit? CONFIRM
Rules	permit $300; ≤2 storeys; roof ≤6/12; not enclosed (one 20-sf store); no toilets; lower deck ≥18 in above 320 ft; lights if >50 ft out OFFICIAL

Positives (+), negatives (-) and alerts (!)

+ HOA sewer: no septic field, so the most room for a house, pool and yard
+ Cheapest way into White Rock: the CAD values Lot 11 at $85,197 of land, about half the median for the 12 vacant White Rock lots ($166k)
+ Two neighbours built 977- and 1,024-sf boathouses on the same water in 2023, so TRWD has approved boathouses here
+ Gated, 16 of 28 lots built, median home value about $1.2M (CAD), so a large home fits the street
+ Steel bulkhead already in place (CAD: 170 ft, 2015)
+ Asking price equals the CAD value; listed on and off since 2022, so there is room to negotiate
- Basin depth unknown: the TWDB 2018 soundings stop about 200 ft away, where the bottom is 306.3 ft (8.7 ft deep at full pool, 5.9 ft today)
- The basin is 60–110 ft across at full pool, so one third of its width limits how far a dock can reach (about 26 ft here)
- The lot is a wedge that narrows to the water; 13% of it (the shore strip) is FEMA Zone A
- HOA dues $3,530/yr while you hold the lot (MLS figure, sewer included)
- White Rock's CC&Rs are not online. Height limits, set-backs from the water, boathouse rules and build-time limits are all unknown
! The HOA's sewer plant (TCEQ permit WQ0014821002, 8,000 gal/day for 28 lots) broke its effluent limits for at least nine months in 2023–24. The TCEQ agreed order (Texas Register notice, 19 Dec 2025) deferred $18,150 of a $21,750 penalty for financial inability to pay. Ask about special assessments, plant upgrades and spare capacity before you commit
! The listing says "deep water". That describes the main lake, not the basin in front of the lot
! The Teel team lists this lot and also advertises as buyer's agents. Use your own buyer's agent or get the intermediary terms in writing

Before you commit to this lot

offer prices are estimates

1. Before any offer, sound the basin on site: depth at 10, 20, 30 ft out, at full pool and today (a marked pole from a kayak works).
2. Get the CC&Rs, the HOA budget and the sewer plant's status in writing (HOA e-mail).
3. Ask TRWD whether a 1,200-sf boathouse fits beside the two existing ones, and whether dredging is allowed if the basin is shallow.
4. Offer ≈$80–85k with a 21–30-day option. Make it subject to TRWD's dock answer and the HOA's written sewer-tap confirmation.
5. Survey in the option period: corners, 315/320-ft lines, Zone A line, bulkhead position.

Budget for the big build

ESTIMATE

House, ≈6,000 sf heated + 3-car garage, ≥60% stone/glass	$300–400/sf	**$1.8–2.4M**
Foundation engineering, pad, drainage on clay		**$60–120k**
Boathouse ≤1,200 sf with lift and sundeck		**$100–200k**
Sewer tap, water, electric, HOA review		**$15–35k**
Design, survey, geotech, permits		**$60–120k**


2026 Texas lake-home ranges; get two bids. Boathouse CAD values nearby are $49–78k (depreciated).

B · 5001 Arrowhead Pt, Streetman, TX

Rustling Oaks Estates Ph II, Blk 1 Lot 33 · 0.50 ac · CAD 56587 · MLS 21298338
owner: Danny & Leanna Pitts, who live next door at 5003 (Lot 32); deed 10 Apr 2015

$99,900	$68,849	≈9.9k sf	918 sf	3.2 ft
asking	CAD 2026	max heated (theory)	max dock	depth at lift today

Evidence: OFFICIAL official record · GIS lidar/GIS, not a survey · ESTIMATE this report's estimate · CONFIRM still to confirm with the named party. Elevations in ft above sea level (NAVD88). Lake 312.16 ft on 9 Nov 2026, 2.84 ft below full pool.

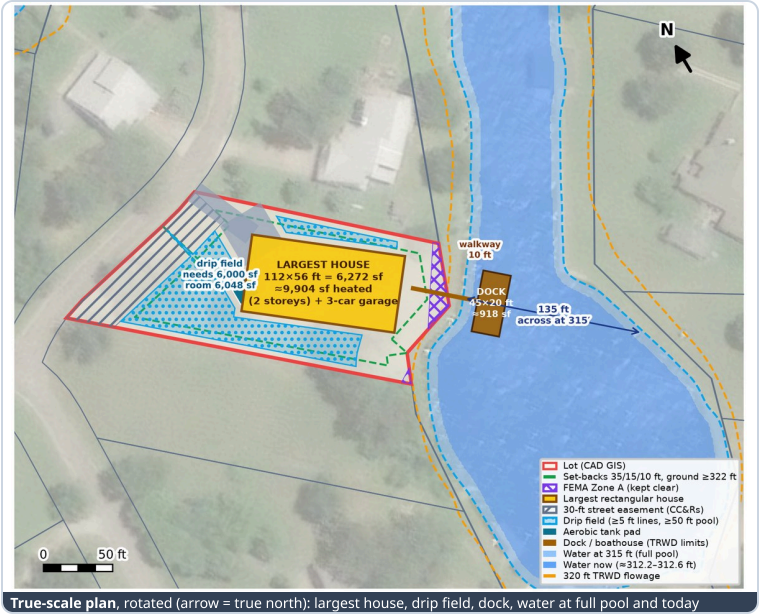


True-scale plan, rotated (arrow = true north): largest house, drip field, dock, water at full pool and today


Largest home: feasibility

test fit, not a design

Limit	**drip field**: a 9,904-sf, 6-bedroom house needs 600 gal/day ÷ 0.10 = 6,000 sf of drip; room left 6,048 sf ESTIMATE
Footprint	**112×56 ft = 6,272 sf** incl. 3-car garage (29% of the lot; cap 40% = 8,712 sf) ESTIMATE
Heated	**≈9,904 sf** on two storeys with drip 50 ft from the pool; ≈8,912 sf at 75 ft ESTIMATE
CC&Rs	Ph II Declaration, Vol 1224 p 638 (1991): ≥1,600 sf heated; ≥5 ft side/rear; 30-ft street easement; no wells; no metal storage buildings; metal roof only with ACC; walls + roof done ≤120 days after start OFFICIAL
ACC fees	$500 road fee + $0.85/sf of slab (≈$5,331 here), boathouse $750, pool $1,000 (2024 schedule) OFFICIAL
Septic	aerobic + subsurface drip by an RS/PE; TRWD permit $400. 1-acre rule n/a: final plat 1 Nov 1990 OFFICIAL; legal 0.500 ac meets TCEQ's ½ ac CONFIRM
Sensible	4,000–5,500 sf heated: still the biggest home in the subdivision; leaves room for a pool
Zoning	likely SF-3 CONFIRM: front 35, rear 15, side 10 ft; ≤40% cover; 2½ storeys

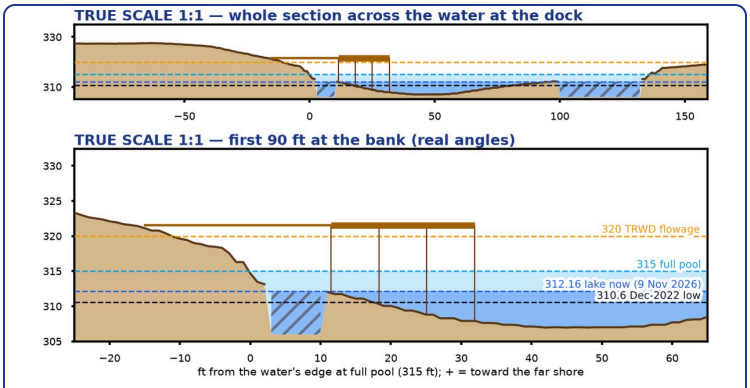

True scale 1:1 section through the dock, across the water

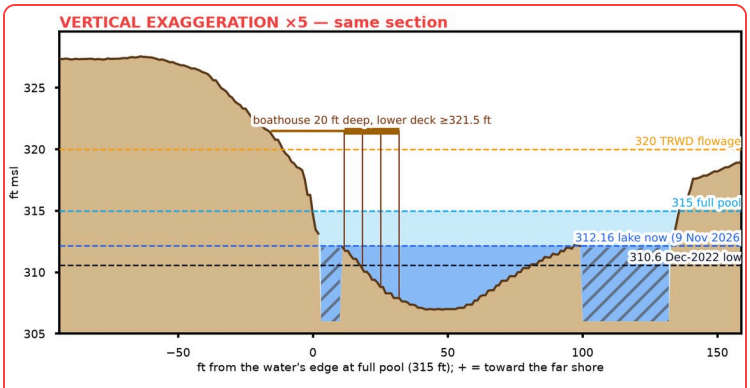

Same section, vertical exaggeration ×5 (heights stretched to show depth)

Private dock: feasibility

Size	TRWD: 8 sf × 115 ft = **918 sf** incl. boathouse; one walkway ≤8 ft wide not counted OFFICIAL
Water	a narrow channel (≈75 ft) meets a wider cove; 135 ft across at the dock spot GIS
Fit	**45×20 ft = 918 sf** after a 10-ft walkway; reaches 30 ft from the 315-ft edge, inside ⅓ of the width; 69 ft passage ESTIMATE
Depth	over the lift: **6.1 ft** at full pool, **3.2 ft** today, 1.6 ft at the Dec-2022 low (TWDB 2018 survey; nearest sounding 9 ft) GIS
Deeper	a 30-ft walkway (reach 49 ft) gives 7.6 / 4.8 / 3.2 ft; TRWD prefers the shortest reach that works ESTIMATE
Lot line	CAD GIS line 8–21 ft back from the 315-ft edge, near 320 ft: survey and TRWD to confirm the shoreline CONFIRM
Wall	steel, CAD 100 ft, 2020, 68% good; TRWD permit? CONFIRM · seller's boathouse at 5003: 936 sf OFFICIAL

Positives (+), negatives (-) and alerts (!)

+ Lowest carrying cost: $144/yr POA dues (recorded CC&Rs) and about $970–1,180/yr tax today
+ Phase II was platted in 1990, so TRWD's 1-acre septic rule (lots split after 8 Apr 2011) does not apply; the legal 0.500 ac meets TCEQ's ½-acre minimum
+ Real survey depth under the dock: 6.1 ft at full pool, 3.2 ft today; a 49-ft reach gives 7.6 / 4.8 ft
+ Flat, high ground: 99.8% above 320 ft, only 2.5% in Zone A
+ Short, permissive CC&Rs: 1,600 sf minimum, 5-ft side and rear set-backs, no size or height cap
+ TRWD's Richland-Chambers office is in Streetman, 140 FM 416
- Asking $99,900 is 1.45× the 2026 CAD value ($68,849), which itself rose 45% in one year
- The tax is capped now (taxable $56,796, the 20% circuit breaker). The cap ends for a buyer: ≈$1,540/yr at a $90k value
- Over-building risk: Rustling Oaks' most valuable homes are 2,200–3,500 sf (CAD up to $844k)
- The drip field limits the house; a pool would compete with it for space
- Developer Kodiak TJ LLC still owns 54 vacant lots nearby, which may hold resale prices down
! CC&R ¶H: outside walls painted and roof finished within 120 days of starting. That is tight for a large custom home; agree how the ACC counts the 120 days before you pour the slab
! CC&R ¶J: owners may not drill water wells. ¶G: metal roofs need ACC approval
! The CAD GIS lot line runs 8–21 ft back from the full-pool water's edge, near the 320-ft contour. The survey must show where the plat line is, and TRWD must agree on the shoreline length
! The seller owns the house next door. Check that none of 5003's septic, drip lines, water line, fence or irrigation sits on Lot 33
! POA roads take 6-yard concrete loads only (50,000 lb), so a big slab means more truck trips and short-load fees

Before you commit to this lot

offer prices are estimates

1. Ask the POA/ACC how they apply the 120-day rule to a large home, and confirm the $144 vs $644 fee ($644 may be dues plus the $500 road fee).
2. Ask TRWD how it measures the shoreline here and whether a 30–50-ft walkway is acceptable.
3. Offer ≈$85–90k with a 21–30-day option, subject to a septic site evaluation for 6 bedrooms and the survey.
4. In the option period, get the survey (plat line vs 315/320 ft, encroachments from 5003) and the septic evaluation.
5. Walk away if the drip field will not fit your bedroom count, or the survey shows 5003's systems on the lot.

Budget for the big build

ESTIMATE

House, ≈5,000 sf heated + 3-car garage	$250–325/sf	**$1.25–1.6M**
Aerobic septic + 6,000-sf drip field (6 BR)		**$25–45k**
Foundation engineering, pad, drainage on clay		**$50–100k**
Boathouse 918 sf with lift + 10–30-ft walkway		**$80–160k**
Water, electric, POA fees ($500 + $0.85/sf of slab)		**$15–30k**
Design, survey, geotech, permits		**$50–100k**

2026 Texas lake-home ranges; get two bids. Boathouse CAD values nearby are $49–78k (depreciated).

First steps and money before a final decision

Spend nothing until the answers come back, then spend only on the lot you choose, inside a paid option period

$0 stage 0 | **≈$2.2–4.4k** Lot A before closing | **≈$3.0–5.9k** Lot B before closing

Stage	When	What	Cost	Lot
0	**This week**	Send the 14 e-mail drafts in this document; call TRWD; read the TCEQ file on the White Rock plant; check the County Clerk records for plats and CC&Rs	$0	A + B
0	**This week**	Visit both lots while the lake is 2.8 ft low: see the bank and walls; measure depth at the dock spot with a marked pole from a kayak; ask the seller to show the corner pins	$0–150 (fuel, kayak)	A + B
1	**Week 2–3**	Pick ONE lot from the answers. Offer with a 21–30-day option period and the contingencies below	Option fee $200–500, credited at closing	chosen lot
2	**Option period**	Boundary + topographic survey: corners, 315/320-ft lines, Zone A line, walls, trees, easements; add a few depth soundings at the dock spot	$2,000–3,500 (+$300–500 soundings)	chosen lot
2	**Option period**	Septic site evaluation with soil profile holes for 6 bedrooms (Lot B only)	$750–1,500	B only
2	**Option period**	HOA/POA resale certificate, title commitment, TRWD pre-application site meeting, dock builder's site visit and budget	$0–375 (certificate; the seller often pays)	chosen lot
2	**Option period**	Optional: designer's test fit of the house on the survey	$500–2,500	chosen lot
3	**After closing**	Geotechnical report; architect and engineer; septic design and TRWD OSSF permit (B); TRWD dock permit; ACC/HOA approval; county permit ($0.25/sf of heated area)	$1,800–3,000 geotech + permits ≈$0.7–3k + design	chosen lot

What to spend before committing

Lot A	**≈$2.2–4.4k**: option fee, survey with soundings, resale certificate
Lot B	**≈$3.0–5.9k**: the same plus the septic site evaluation
Both at once	≈$5–10k. Not worth it: use the free answers to choose, then spend on one lot
After closing	geotech $1.8–3k, design, TRWD dock $300, OSSF $400 (B), county $0.25/sf, ACC fees (B)

Put these in the offer

- Option period of 21–30 days (TREC contract, paragraph 5); you can end the contract for any reason and lose only the option fee.
- TRWD written answer on dock size and reach (and dredging for Lot A) before the option ends.
- Lot A: HOA letter confirming a sewer tap for Lot 11, the tap fee, and no pending special assessment.
- Lot B: septic site evaluation that supports a 6-bedroom aerobic + drip system.
- Survey that matches the legal description, with no encroachments; title commitment with the easements listed.
- Seller's disclosure and copies of any TRWD permits for the existing walls.

Walk away if

- **A:** the basin is under ≈4 ft at full pool where the boathouse would go and TRWD will not allow dredging.
- **A:** the HOA cannot confirm a sewer tap, or a large special assessment for the plant is coming.
- **A:** the CC&Rs cap height, size or the water set-back below your plan.
- **B:** the septic evaluation will not support the bedrooms you want.
- **B:** the survey finds 5003's septic or utilities on Lot 33, or the plat line leaves TRWD unwilling to permit the dock.
- **B:** the ACC will not give a workable reading of the 120-day rule.

Approvals, in order

1. HOA (A) or ACC (B) written approval of plans, plot plan and materials (B: valid 6 months).
2. TRWD: dock / boathouse permit ($300), wall work, and the septic permit for B ($400).
3. Navarro County building permit: site/survey plan, OSSF permit number (B), $0.25/sf of heated area.
4. Three third-party inspections: foundation (before concrete), framing/MEP, final.
5. 911 address through the building permit.

Typical timeline

Weeks 0–2	e-mails, site visit, depth check, TRWD pre-application call
Weeks 2–6	offer, option period: survey, septic evaluation (B), HOA/POA documents
Weeks 6–10	closing (30–45 days after contract)
Months 3–8	design, geotech, approvals (TRWD review 10 + up to 30 business days)
Months 8–24	build 12–16 months; B: walls and roof within 120 days of the start

The area: positives (+), negatives (-) and alerts (!) for both lots

+ Richland-Chambers is Texas's third-largest inland lake: 43,874 ac at full pool, 25.6 ft mean and 76.8 ft maximum depth (TWDB 2018)
+ Both house pads sit near 327–329 ft, 9–11 ft above TRWD's 318-ft 100-year lake level, so no fill is needed
+ TRWD's 2026 rules are published and cheap to use: dock permit $300, septic permit $400, 10 + 30 business days review
+ Navarro County grew 8.6% from 2020 to 2025
- The lake was below 312 ft on 27% of days since 2000; the 2006 low (303.6 ft) dried both coves. Expect seasons when a lift sits in mud
- Expansive clay (shrink-swell LEP ≈9%): plan an engineered post-tensioned slab or piers; for a big house budget $60–120k for foundation and pad
- FEMA NRI rates tornado and wind risk relatively high and hail moderate: wind/hail deductibles and the roof choice matter
- Property tax runs 1.57% (A) to 1.71% (B) of value: a $2M home ≈$31k/yr, a $1.4M home ≈$24k/yr before any homestead exemption
! Order of approvals: HOA/ACC → TRWD (dock, walls; septic for B) → county building permit (needs the OSSF permit number and a site plan) → three third-party inspections → 911 address
! Over-improvement: lenders and appraisers compare with nearby sales. A very large house can appraise below its cost, which matters if you need a construction loan
! Lake water belongs to TRWD: irrigation from the lake and any work below 320 ft need a TRWD permit

Due-diligence e-mail drafts — 11 Bayview Cir & 5001 Arrowhead Pt

One e-mail per listing agent and association, and one per authority or contractor covering both lots, so each office answers once. Replace the bracketed name and contact lines before sending. Where no e-mail address is published, the line says so; call or use the office's web form. Send them all this week: they cost nothing and the answers decide which lot is worth a survey.

1. **Listing agent:** disclosure, survey, CC&Rs, sewer stub, wall permit, sales, intermediary terms
2. **Listing agent:** disclosure, survey, 5003's systems on Lot 33?, wall permit, $644 vs $144
3. **HOA:** CC&Rs, dues, assessments, sewer plant status and capacity, tap
4. **POA:** dues, the 120-day rule, boathouse rules, roof, lawsuit, fees
5. **TRWD:** dock size and reach, dredging, shoreline, walls, septic
6. **Navarro County Planning & Development:** zoning district, height, Zone A, accessory dwelling, permits
7. **Navarro CAD:** 2027 value after a sale, Lot 11's low land value
8. **Utilities:** 1-in meter, tap fees, 400-amp service to house and boathouse
9. **Surveyor:** boundary, topo, 315/320 lines, encroachments, depths
10. **Septic designer:** 6-BR aerobic + drip layout, 5003's system
11. **Geotechnical engineer:** borings, PVR, slab/pier design near the wall
12. **Dock builder:** boathouse + lift budget, soundings, dredging, walls
13. **Title company:** easements, CC&Rs, liens, Lots 32/33 agreements
14. **Insurance agent:** builder's risk, wind/hail, flood, boathouse

1. Listing agent — 11 Bayview Cir

Lot A · Bayview

To: John & Julie Teel, RE/MAX LakeSide Dreams · julie@teelteam.com · 903-874-0001
Subject: Questions before an offer — Lot 11 Bayview Cir, White Rock (MLS 21146775)

Hello Julie and John,

I am interested in Lot 11 Bayview Circle and plan to build a large home with a private boathouse. Before I make an offer, could you help with the following?

1. The seller's disclosure, any survey, and the recorded White Rock plat (volume and page).
2. The White Rock CC&Rs and architectural guidelines, the HOA budget, and the HOA contact for a buyer.
3. Is a sewer stub in place for Lot 11? What is the tap fee? Is any special assessment planned for the sewer plant?
4. Does the steel bulkhead have a TRWD permit? Has the basin in front of the lot ever been sounded or dredged?
5. White Rock lot and home sales in the last 24 months (MLS sold data).
6. Any earlier contracts that failed, and how flexible the seller is on price and on a 21–30-day option period.
7. You also advertise as buyer's agents. If I wrote an offer through you, would you act as intermediary? Please send the terms.

Lot: 11 Bayview Cir, Corsicana TX 75109 — White Rock Sub. Lot 11, 0.65 ac — Navarro CAD 63254 — MLS 21146775

Thank you,
[Your name]
[Phone] · [E-mail]

2. Listing agent — 5001 Arrowhead Pt

Lot B · Arrowhead

To: Laura Smith, Keller Williams Realty · 817-795-2500 (e-mail not published; use the MLS or LakeHouse.com contact form)
Subject: Questions before an offer — 5001 Arrowhead Point, Rustling Oaks (MLS 21298338)

Hello Ms. Smith,

I am interested in 5001 Arrowhead Point and plan to build a large home with a private boathouse. Before I make an offer, could you help with the following?

1. The seller's disclosure, any survey, and the CC&Rs mentioned in the listing ("available in Transaction Desk").
2. The sellers live next door at 5003. Do any of 5003's septic tank, drip lines, water or power lines, fence, irrigation or driveway sit on Lot 33?
3. Does the 2020 steel wall have a TRWD permit? Where is the sellers' boathouse relative to the shared line?
4. The MLS shows POA dues of $644/yr; the recorded CC&Rs set $12/month. Does $644 include the $500 road fee?
5. Any septic site evaluation, perc test or soil report for Lot 33.
6. Rustling Oaks waterfront lot and home sales in the last 24 months (MLS sold data).
7. The 2026 CAD value is $68,849. How flexible are the sellers on price and on a 21–30-day option period?

Lot: 5001 Arrowhead Pt, Streetman TX 75859 — Rustling Oaks Estates Ph II Blk 1 Lot 33, 0.50 ac — Navarro CAD 56587 — MLS 21298338

Thank you,
[Your name]
[Phone] · [E-mail]

3. HOA — White Rock Homeowners Association

Lot A · Bayview

To: White Rock Homeowners Association, Inc., 300 White Rock Rd, Corsicana TX 75109 · attn. the Board (TCEQ filings of 2024–25 name Susan Gilliland as President) · e-mail not published: ask the listing agent to forward
Subject: Prospective buyer, Lot 11 Bayview Circle: rules, dues and sewer

Hello,

I may buy Lot 11 Bayview Circle (Navarro CAD 63254) and build a large home (5,000+ sq ft) with a private boathouse. Could the Board or architectural committee help with these questions?

1. The recorded CC&Rs, any amendments, and the architectural guidelines: minimum and maximum size, height, set-backs from the water and side lines, exterior materials, roofs, fences, and any time limit to start or finish building.
2. Rules for docks and boathouses in the Bayview basin, which Lot 11 shares with two existing boathouses.
3. 2026 and expected 2027 dues ($3,530/yr per the MLS). What do they cover? Any special assessment, planned or under discussion?
4. The sewer plant: has the TCEQ agreed order (Docket 2024-0591-MWD-E) been met? What is the status of the TPDES permit renewal (WQ0014821002)? With a permit of 8,000 gallons a day, how many more homes can the plant take? Is a tap reserved for Lot 11, and what are the tap fee and connection rules (gravity or grinder pump)?
5. The reserve fund balance and the latest budget.
6. Resale certificate and transfer fees, and the rules for contractors and gate access during construction.
7. Rules on rentals and on short stays.

Lot: 11 Bayview Cir, Corsicana TX 75109 — White Rock Sub. Lot 11, 0.65 ac — Navarro CAD 63254 — MLS 21146775

Thank you,
[Your name]
[Phone] · [E-mail]

4. POA — Rustling Oaks Estates POA and ACC

Lot B · Arrowhead

To: ACC: Mike Stotler · mstotler9686@gmail.com · 281-900-9686; cc Richard Coker · rc.lake01@gmail.com; Michael Norris · Michael.L.Norris@outlook.com · POA: 4001 Loper Dr, Streetman TX 75859-7260 (2026 President Dan Plume)
Subject: Prospective buyer, Phase II Lot 33 (5001 Arrowhead Pt): ACC rules for a large home and boathouse

Hello Mr. Stotler,

I may buy 5001 Arrowhead Point (Phase II, Block 1, Lot 33) and build a large home (4,000–5,500 sq ft) with a boathouse. I have read the Phase II Declaration (Vol. 1224, p. 638) and the ACC handbook. Could you confirm:

1. Annual dues: $12/month per the Declaration. The MLS shows $644/yr. Is that the dues plus the $500 road fee? Any special assessment, planned or past due, on Lot 33?
2. Paragraph H requires exterior walls and roof complete within 120 days after construction starts. How does the ACC count the 120 days for a large custom

home (from the slab pour?), and can it be extended?
3. Any recorded amendments to the Phase II Declaration since 1991.
4. ACC rules for boathouses and walkways (size, roof, colour) beyond TRWD's, and the $750 boathouse fee.
5. Any limit on height or size? Do you approve metal roofs (paragraph G)?
6. For a large slab, the concrete-truck rules (6-yard loads) and the fee of $0.85 per sq ft of slab.
7. What utilities run in the 30-ft front easement on Lot 33?
8. Is the 2013 lawsuit with the developer settled, and is any other dispute open?
9. The resale certificate fee, and how long ACC approval usually takes.

Lot: 5001 Arrowhead Pt, Streetman TX 75859 — Rustling Oaks Estates Ph II Blk 1 Lot 33, 0.50 ac — Navarro CAD 56587 — MLS 21298338

Thank you,
[Your name]
[Phone] · [E-mail]

5. TRWD — Richland-Chambers permits (docks, walls, septic)

both lots

To: TRWD Richland-Chambers office, 140 FM 416, Streetman TX 75859 · (903) 389-3928 (8–11 am Mon–Thu) · fax (903) 389-7587 · ask for the permit staff e-mail
Subject: Pre-application questions: dock size and septic for two lots (Bayview Cir and Arrowhead Pt)

Hello,

I am deciding between two lots and want to understand what TRWD would permit before I commit. I would welcome a pre-application site meeting.
- 11 Bayview Cir, Corsicana TX 75109 — White Rock Sub. Lot 11, 0.65 ac — Navarro CAD 63254 — MLS 21146775 — about 158 ft of shoreline on a basin about 90–100 ft wide; steel bulkhead (CAD: 2015)
- 5001 Arrowhead Pt, Streetman TX 75859 — Rustling Oaks Estates Ph II Blk 1 Lot 33, 0.50 ac — Navarro CAD 56587 — MLS 21298338 — about 115 ft of shoreline where a narrow channel meets a wider cove; steel wall (CAD: 2020)

Questions:
1. Shoreline length you would use for the Attachment I size limit on each lot. For Bayview the formula gives 1,230 sq ft; I plan to stay at 1,200 sq ft to keep the 5-ft side clearance. Is that right?
2. Bayview: the basin already has two boathouses (218 White Rock and 114 Bayview, both 2023). How far could a new boathouse extend, and what passage must it leave? Is dredging allowed if the basin is shallow?
3. Arrowhead: the CAD line sits 8–21 ft back from the 315-ft water's edge. Is that strip District Land, and how do you measure the shoreline? Would you accept a 30–50-ft walkway to reach about 6–7 ft of water at full pool?
4. Do you have permits on file for the existing walls on both lots, and for the boathouse at 5003 Arrowhead Pt?
5. Septic at Arrowhead: Phase II was platted in 1990. Please confirm that §3.03(c) of the 2026 OSSF Guidelines (1-acre minimum) does not apply, and which set-back from the 315-ft line you apply to a drip field on clay. Are there OSSF records for Lot 33 or for the system at 5003?
6. Typical review times for a dock permit and a residential OSSF permit.

Thank you,
[Your name]
[Phone] · [E-mail]

6. Navarro County Planning & Development

both lots

To: Stanley Young, Director · syoung@navarrocounty.org · 601 N. 13th St., Suite 1, Corsicana TX 75110 · (903) 875-3312 · fax (903) 875-3314
Subject: Zoning and permit questions for two lakeshore lots (CAD 63254 and 56587)

Hello Mr. Young,

I am evaluating two vacant lots inside the Richland-Chambers lakeshore zoning area and plan a large two-storey home on one of them:
- 11 Bayview Cir, Corsicana TX 75109 — White Rock Sub. Lot 11, 0.65 ac — Navarro CAD 63254 — MLS 21146775
- 5001 Arrowhead Pt, Streetman TX 75859 — Rustling Oaks Estates Ph II Blk 1 Lot 33, 0.50 ac — Navarro CAD 56587 — MLS 21298338

Could you confirm in writing:
1. The zoning district of each lot (SF-3 or another), with the front, rear and side set-backs, maximum coverage and maximum height. Is “2½ stories” the only height limit, or is there a limit in feet?
2. How the 50% rule for the area behind the side-line midpoints is measured on a wedge-shaped lot (Bayview).
3. Whether a floodplain development permit or a minimum floor elevation applies where a lot has a Zone A strip along the water (13% of the Bayview lot).
4. Whether an accessory dwelling (up to 40% of the house) and a detached garage are allowed.
5. The building permit fee ($0.25 per sq ft of heated area), the three required inspections, and the 911 address process.
6. For Arrowhead: whether the county or TRWD issues the septic permit, and whether a temporary RV during construction needs a Specific Use Permit.

Thank you,
[Your name]
[Phone] · [E-mail]

7. Navarro CAD — value questions

both lots

To: Navarro Central Appraisal District, 1250 N. 45th St., Corsicana TX 75110 · (903) 872-6161 · general.info@navarrocad.com
Subject: Questions about 2026 values for parcels 63254 and 56587

Hello,

I am a prospective buyer of two vacant lots and would like to understand their values:
1. Parcel 56587 (5001 Arrowhead Pt): the 2026 market value is $68,849 and the taxable value is $56,796. Is the difference the 20% circuit-breaker limit (2025 value $47,330 × 1.2)? Will the 2027 value for a new owner be the full market value?
2. Parcel 56587: land rose from $43,560 to $65,340 in 2026. Was this a neighbourhood-wide change?
3. Parcel 63254 (11 Bayview Cir): land is $85,197, about half the value of other vacant White Rock lots. What adjustment explains it (shape, flood zone, water frontage)?
4. How would a sale price be used in setting the 2027 values?

Thank you,
[Your name]
[Phone] · [E-mail]

8. Utilities — water and electric

both lots

To: M.E.N. WSC, 8542 S US Hwy 287, Corsicana · (903) 872-1899 (Bayview) | Winkler WSC, 2038 Loper Dr, Streetman · (903) 599-9096 (Arrowhead; number from its nonprofit listing) | Navarro County Electric Co-op · (903) 874-7411 (both)
Subject: New service for a large home: availability and fees

Hello,

I may build a large home (5–6 bedrooms, 5,000+ sq ft) on one of these lots, both inside your service area on the state map:
- 11 Bayview Cir, Corsicana TX 75109 — White Rock Sub. Lot 11, 0.65 ac — Navarro CAD 63254 — MLS 21146775 (M.E.N. WSC)
- 5001 Arrowhead Pt, Streetman TX 75859 — Rustling Oaks Estates Ph II Blk 1 Lot 33, 0.50 ac — Navarro CAD 56587 — MLS 21298338 (Winkler WSC)

Water: Is a 1-in meter available at the lot (for a large home with irrigation and possibly fire sprinklers)? What are the membership, tap and impact fees, the lead time and the typical pressure? Any moratorium?
Electric (NCEC): Is service at the road? What would a 400-amp underground service cost, including a feed to the boathouse, and how long does it take?

Thank you,
[Your name]
[Phone] · [E-mail]

9. Surveyor — request for quote

both lots

To: e.g. Jimmy W. Pogue Inc. Land Surveyors (serves Navarro County) · Andress Surveying · any Texas RPLS who works on TRWD lakes
Subject: Quote: boundary + topographic survey of a lakefront lot (one of two)

Hello,

Please quote a boundary and topographic survey for one of these lots (I will confirm which):
- 11 Bayview Cir, Corsicana TX 75109 — White Rock Sub. Lot 11, 0.65 ac — Navarro CAD 63254 — MLS 21146775
- 5001 Arrowhead Pt, Streetman TX 75859 — Rustling Oaks Estates Ph II Blk 1 Lot 33, 0.50 ac — Navarro CAD 56587 — MLS 21298338

Scope:
1. Boundary with corners found or set, the recorded plat lines, easements, and any encroachments (for Arrowhead, check whether anything of the house next door at 5003 sits on Lot 33).
2. 1-ft contours (NAVD88) with the 315-ft and 320-ft lines, the FEMA Zone A line, top and toe of bank, and the steel wall.
3. For Arrowhead: where the plat's water line sits relative to the 315-ft and 320-ft lines.
4. Trees of 10 in and larger in the building area.
5. Add-on: water depths at the planned dock spot (every 10 ft out to 60 ft) with the lake level of the day.

Please include price, turnaround and a sample drawing.

Thank you,
[Your name]
[Phone] · [E-mail]

10. Septic designer / site evaluator (Lot B)

Lot B · Arrowhead

To: TRWD-registered OSSF designer or professional sanitarian (ask TRWD (903) 389-3928 for local names)
Subject: Quote: site evaluation and aerobic + drip design for a 6-bedroom home

Hello,

I am evaluating 5001 Arrowhead Pt, Streetman TX 75859 — Rustling Oaks Estates Ph II Blk 1 Lot 33, 0.50 ac — Navarro CAD 56587 — MLS 21298338. TRWD permits septic here. I want the largest home the lot can serve: about 5,000–9,000 sq ft heated with 6 bedrooms.

Please quote:
1. Soil profile holes and a site evaluation (soil class within 1 ft of the emitters).
2. A preliminary layout for an aerobic unit + subsurface drip, showing the set-back from the 315-ft line, the 30-ft front easement, and the drip area for 420, 480, 540 and 600 gal/day.
3. Locating the system of the house next door (5003, same owner) to confirm it is not on Lot 33.
4. Installed cost range and the yearly maintenance contract.

Thank you,
[Your name]
[Phone] · [E-mail]

11. Geotechnical engineer — request for quote

both lots

To: Licensed geotechnical firm serving Navarro County (Corsicana, Waxahachie or Dallas)
Subject: Quote: geotechnical report for a large two-storey home on expansive clay

Hello,

Please quote a residential geotechnical investigation for a two-storey home of about 5,000–7,000 sq ft (footprint about 6,000 sq ft with garage) on one of these lots:
- 11 Bayview Cir, Corsicana TX 75109 — White Rock Sub. Lot 11, 0.65 ac — Navarro CAD 63254 — MLS 21146775 — about 21 ft of fall to a steel bulkhead
- 5001 Arrowhead Pt, Streetman TX 75859 — Rustling Oaks Estates Ph II Blk 1 Lot 33, 0.50 ac — Navarro CAD 56587 — MLS 21298338 — about 10 ft of fall to a steel wall

NRCS maps sandy loam over clay with high shrink-swell. Scope: borings to 20–25 ft, PVR, post-tensioned slab and pier design values, and comments on building near the wall and bank.

Thank you,
[Your name]
[Phone] · [E-mail]

12. Dock builder — budget and site visit

both lots

To: e.g. Kyle Construction (Streetman, boathouses since 1984) · BR Construction LLC (Corsicana) · Goodin and Perry Construction (Corsicana) — names from their own listings, not endorsements
Subject: Budget for a covered boathouse with lift on Richland-Chambers

Hello,

I am choosing between two lots and would like a site visit and a budget range for a private boathouse on each:
- 11 Bayview Cir, Corsicana TX 75109 — White Rock Sub. Lot 11, 0.65 ac — Navarro CAD 63254 — MLS 21146775 — up to 1,200 sq ft in a basin about 90–100 ft wide; depth not surveyed
- 5001 Arrowhead Pt, Streetman TX 75859 — Rustling Oaks Estates Ph II Blk 1 Lot 33, 0.50 ac — Navarro CAD 56587 — MLS 21298338 — up to 918 sq ft, about 6 ft deep at full pool 30 ft out (TWDB 2018 survey)

Questions:
1. Budget for a covered single or double slip with a lift for a 22–24-ft wake boat, and a sundeck (two storeys at most, lower deck 18 in above 320 ft).
2. Could you sound the water at the dock spot? Would you recommend dredging, a longer walkway, or both?
3. The condition of the existing steel walls.
4. Do you handle the TRWD permit and its insurance requirements? Current lead time?

Thank you,
[Your name]
[Phone] · [E-mail]

13. Title company — preliminary title

both lots

To: e.g. Navarro County Abstract Co. · Micro Title Navarro County · Royal Title (Corsicana)
Subject: Preliminary title report for a vacant lakefront lot (one of two)

Hello,

Before contracting, I would like a preliminary title report or a quote for one of these lots:
- 11 Bayview Cir, Corsicana TX 75109 — White Rock Sub. Lot 11, 0.65 ac — Navarro CAD 63254 — MLS 21146775
- 5001 Arrowhead Pt, Streetman TX 75859 — Rustling Oaks Estates Ph II Blk 1 Lot 33, 0.50 ac — Navarro CAD 56587 — MLS 21298338

Please list recorded easements (including TRWD flowage easements to 320 ft and, for Arrowhead, the 30-ft front easement in the Phase II Declaration, Vol. 1224 p. 638), the CC&Rs and amendments that apply, mineral reservations, liens, HOA or POA liens, and any agreement between Lots 32 and 33 of Rustling Oaks Ph II (one owner holds both).

Thank you,
[Your name]
[Phone] · [E-mail]

14. Insurance agent — quotes for budgeting

both lots

To: Any agent who writes Texas lake homes (wind/hail and flood)
Subject: Insurance estimate for a large lake home and boathouse

Hello,

I plan to build a 5,000–7,000 sq ft home with a covered boathouse on Richland-Chambers Lake (Navarro County), either at 11 Bayview Cir, Corsicana 75109 or at 5001 Arrowhead Pt, Streetman 75859. Both house sites are in FEMA Zone X, with a Zone A strip along the water.

Could you give a rough yearly range for: builder's risk during construction; homeowners cover with wind and hail (and the usual deductible); a preferred-risk flood policy; and boathouse and lift cover?

Thank you,
[Your name]
[Phone] · [E-mail]

Glossary, sources, method and limits

How to read the tags and numbers in this document

Glossary

315 ft / 320 ft	Richland-Chambers normal pool / TRWD flood-flowage line (ft above sea level)
TRWD	Tarrant Regional Water District: owns the lake, permits docks, walls and (here) septic systems
Attachment I	TRWD Residential Improvement Permit Guidelines (2026): dock size and placement rules
Navigable passage	open water a dock must leave: ≥20 ft wide in a residential cove (TRWD ordinance)
One-third rule	TRWD guideline: no structure may take more than ⅓ of a channel's width
OSSF / ATU	on-site sewage facility (septic) / aerobic treatment unit
Drip field	buried drip lines that disperse treated effluent; area = flow ÷ 0.10 gal/sf/day on clay
TCEQ Table III	state table of septic design flow by bedrooms and heated area
TPDES	state permit to discharge treated wastewater (the White Rock plant's permit)
Zone A / Zone X	FEMA 1%-a-year flood zone without a base elevation / minimal flood risk
CC&Rs / ACC	recorded covenants / architectural control committee that approves building
SF-3	county single-family district: ½-acre lots, 35/15/10-ft set-backs, ≤40% coverage, 2½ storeys
Option period	paid days in a Texas contract when the buyer may cancel for any reason
Resale certificate	HOA statement of dues, assessments and violations for a lot being sold
Circuit breaker	Texas 20% yearly cap on taxable value of property under $5M; ends on sale
CAD	central appraisal district (Navarro CAD) that sets values for property tax
GIS / lidar	map data and laser elevation (USGS 2022); not a survey
TWDB	Texas Water Development Board: lake levels and the 2018 lake-bottom survey
VE ×n	vertical exaggeration: heights drawn n times larger than lengths

Sources (read 8–10 Nov 2026)

- Navarro CAD property records 63254, 56587, 56586 and neighbours (2026 certified values)
- Rustling Oaks Estates Ph II Declaration of CC&Rs, Vol 1224 p 638 (1991); POA management certificate (2007); ACC handbook and fee schedule (2023–24); 2022 bylaws (rustlingoaksestates.org)
- TCEQ agreed order, Docket 2024-0591-MWD-E (White Rock HOA); TPDES permit WQ0014821002 renewal notice (2024)
- TRWD Residential Improvement Permit Guidelines (2026), OSSF Guidelines (2026), General Ordinance (2025), Richland-Chambers improvement guidelines (2001), permit fees (Feb 2026), contact page
- Navarro County Richland-Chambers Lakeshore Zoning Ordinance (rev. 2017) Table B; 2025 building permit package
- TWDB Water Data for Texas (daily level, 9 Nov 2026), TWDB 2018 volumetric survey, Water Service Boundary Viewer
- USGS 3DEP 1-m lidar (2022); FEMA NFHL; USDA NRCS SSURGO; Esri World Imagery (May 2025)
- LakeHouse.com listings 7100373 and 7885360 (MLS 21146775, 21298338); company listings for dock builders

How the largest home and dock were found

- House: every rectangle (44–136 × 36–116 ft, six angles, 5-ft grid) inside the set-back envelope (ground ≥322 ft, out of Zone A) was tested, largest first. A rectangle passes if it meets the 40% cover cap and the 50% rear-half rule, and, for B, leaves enough drip field after the house, driveway, garage apron and tank pad. The footprint includes a 960-sf garage and 360 sf of porches; heated area = 2 × (footprint - garage - porches).
- Septic flow (B): TCEQ Table III with water-saving fixtures, the larger of 6 bedrooms (420 gal/day) and the heated-area tier (+60 gal/day per 1,500 sf over 5,500 sf); drip area = flow ÷ 0.10.
- Dock: lines were cast every foot along the frontage, perpendicular to it, to measure the water width at 315 ft on the 2022 lidar. A boathouse passes if its outer edge stays within ⅓ of that width and leaves ≥20 ft to the far shore or a neighbour's boathouse, and it sits ≥5 ft inside the side lines drawn perpendicular to the shore. Depth comes from the TWDB 2018 contours and soundings; it counts as measured only where a sounding lies within 60 ft.

Limits

This is a desk study with no site visit. It is not a survey, design, appraisal, legal opinion or permit decision. Lot lines are CAD GIS lines and can be off by several feet; the house and dock shapes are test fits, not designs. White Rock's CC&Rs and the county zoning map are not online, so items marked CONFIRM need the HOA, the county or TRWD. Costs are 2026 ranges for budgeting only. Phone numbers come from each agency's own pages, except Winkler WSC (nonprofit listing) and the dock builders (their own listings).

End note

Date of creation: 10 November 2026 · **Prepared by AI model:** Claude Opus 5.5 (Anthropic), working in Kiro · **File:** Bayview-Arrowhead-BigHome-Dock-DD-and-Emails_10-Nov-26_Claude-Opus-5.5.pdf

Earlier reports in this repository: the 8 Nov 2026 two-lot due diligence (Richland-Chambers-2-Lots-Due-Diligence_08-Nov-26_Claude-Opus-5.5.pdf) and the 10 Nov 2026 Shores re-check. This document adds the largest-home and dock checks, the first-steps plan and the e-mail drafts for the two original lots.