
Three canal lots in The Shores, Richland-Chambers Lake — revised due diligence

Lots 442 & 441 Waters Edge Dr (Phase VI) and Lot 411 Sailboat Dr (Phase V), Corsicana TX 75109 · records re-checked 8–10 Nov 2026 · replaces the scores in "3 Corsicana lakefront lots Comparison"

$265k combined asking | **312.16 ft** lake 9 Nov (pool 315) | **441 › 442 › 411** new ranking

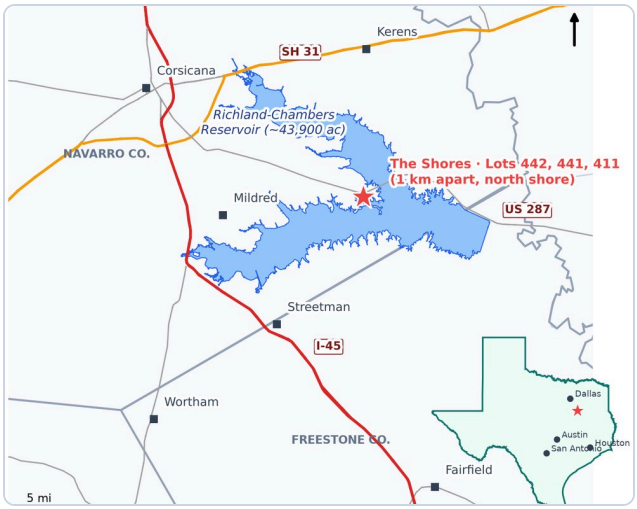

7.2 (was 5.9) — #1 · Lot 441 Waters Edge Dr

Phase VI · 0.531 ac · $105,000 asking · CAD $70,834 · earlier rank #15 of 20

Best match for a large home and a private dock. 105 ft of walled canal allows the largest dock (839 sf). Depth is 5.9 / 7.6 ft at full pool. $105k is 1.5× the 2026 CAD value, but the CAD cut this lot 53% in 2026, and per foot of water it is the cheapest. Expect the tax to rise after the sale. Suggested offer ≈$90–95k, citing the CAD value and the 2025 price cut.

6.6 (was 7.2) — #2 · Lot 442 Waters Edge Dr

Phase VI · 0.558 ac · $94,900 asking · CAD $155,239 · earlier rank #1 of 20

Good canal, small water frontage, highest carrying cost. The canal is the widest (≈113 ft) and the house footprint the largest, but only 60 ft touches the water (dock ≤480 sf). The CAD values it at $155k, 2.2× its neighbours, so tax is $2,246. Unsold for 22 months after $30k of cuts: offer ≈$80–85k and protest the 2027 value.

6.0 (was 6.8) — #3 · Lot 411 Sailboat Dr

Phase V · 0.500 ac · $65,000 asking · CAD $89,720 · earlier rank #2 of 20

Cheapest, but the water access is uncertain. The whole lot sits above 320 ft, but it ends at the canal tract's 315-ft deed line, 25–33 ft from open water at a silted canal head (2.7–3.2 ft deep today). Dock size (280–766 sf) and dredging are TRWD decisions. Buy only after TRWD confirms the dock in writing; otherwise price it as an off-water lot (The Shores' 1-acre off-water lots ask $60–70k).

Key facts (verified 10 Nov 2026)	#1 Lot 441 Waters Edge Dr	#2 Lot 442 Waters Edge Dr	#3 Lot 411 Sailboat Dr
Price, value and holding cost			
Asking · $/acre	**$105,000** · $197,740/ac	**$94,900** · $170,072/ac	**$65,000** · $130,000/ac
Per foot of water	$1,001/ft	$1,582/ft	$680–1,860 (35–96 ft)
CAD 2026 (2025)	$70,834 ($150,240) OFFICIAL	$155,239 ($155,620) OFFICIAL	$89,720 ($89,740) OFFICIAL
2026 tax bill	$1,114 OFFICIAL	$2,246 OFFICIAL	$1,411 OFFICIAL
Holding cost / yr	$2,709–$4,298 ESTIMATE	$3,125–$4,377 ESTIMATE	$2,634–$3,346 ESTIMATE
On the market	32 days (re-listed)	672 days, -$30k	116 days
Land			
Size legal · GIS	0.531 ac · 23,505 sf	0.558 ac · 24,318 sf	0.500 ac · 21,314 sf
Road / water line	105 / 105 ft	160 / 60 ft	102 / 95.8 ft (plat), open water 25–33 ft out
Ground low–high	312.9–330.6 ft · max 50-ft 18°	312.9–331.3 ft · max 50-ft 19°	321.2–336.4 ft · max 50-ft 13°
FEMA	X + 11% Zone A	X	X
Water and dock			
Canal width (315 ft)	≈92 ft	≈113 ft	≈96 ft, silted head
Depth full pool → now	5.9/7.6 → 3.1/4.8 ft	6.1/7.6 → 3.3/4.8 ft	5.5/6.0 → 2.7/3.2 ft
Largest dock (TRWD)	839 sf	480 sf	280–766 sf CONFIRM
Steel wall (CAD)	104 ft (eff. 2021, 73% good)	60 ft (eff. 2021, 73% good)	100 ft (built 2010, 20% good)
Largest home (septic-limited)			
Footprint · heated	6,240 sf · 8,880–9,840 sf	6,656 sf · 10,672 sf	5,632 sf · 8,496–8,624 sf
Septic	aerobic + drip, 6 BR, 600 gal/day	aerobic + drip, 6 BR, 660 gal/day	aerobic + drip, 6 BR, 600 gal/day

Bottom line

- The ranking flips: **441 first, 442 second, 411 third**. The earlier order rested on CAD values that the CAD itself treats inconsistently (page 8).
- All three can take a very large house. The septic drip field, not zoning, sets the limit: about 8,500–10,700 sf heated in theory, 5,000–6,500 sf in practice.
- All three need an aerobic septic system with drip lines, permitted by TRWD. The 2011 one-acre rule does not apply (plats are from 2008).
- The canals are shallow: 5.5–7.6 ft at full pool and 2.8 ft less today. Plan a boat lift and expect low-water seasons.
- A house much above 4,500 sf would be the largest in The Shores; resale may not repay it.

Main corrections to the earlier report (all 18: page 8)

- **CAD values** are real but inconsistent: in 2026 the CAD cut six of eight Phase VI canal lots by 22–57%, but not 442 or 444. The earlier ranking leaned on them.
- **Tax:** the listing figures were 2023–24 bills. The 2026 bills are 442 $2,246, 411 $1,411 and 441 $1,114.
- **Septic:** TRWD's 1-acre rule does not apply (plats from 2008). Half-acre aerobic + drip systems are allowed.
- **Canal depth** was "not surveyed": TWDB sounded the canals in 2018 (5.5–7.6 ft at full pool).
- **Lot 411** ends at the canal tract's 315-ft deed line, 25–33 ft short of open water.
- **HOA:** leases under 90 days are banned (June 2026); the exterior must be done 9 months after the slab.

What to do first, and what to spend

1. **This week, $0:** send the 12 e-mail drafts (second PDF). TRWD's answer on dock length decides 411.
2. **Offer on #1** with a 21-day option period (TREC unimproved-property contract; option fee $200–500).
3. **During the option, ≈$5–9k:** boundary + topo survey $2–4k, septic site evaluation $0.75–1.5k, geotech $1.8–3k, HOA resale certificate ≈$375, title commitment.
4. **Walk away** if TRWD will not confirm the dock, the drip field will not serve 6 BR, or the survey shows an encroachment.

Lot 441 Waters Edge Dr, Corsicana TX

The Shores on Richland Chambers Lake, Phase VI · Navarro County · canal lot · MLS 21407991

$105,000	$70,834	0.531 ac	105 ft	313–331	7.2
asking	CAD 2026	23,505 sf GIS	water frontage	ground ft msl	/10 · was 5.9



Listing photo · LakeHouse.com (NTREIS) · MLS 21407991



Lot outline on Esri imagery



Fly-around view (lidar 3-D, true scale)



Texas location · 71 mi SE of Dallas

Evidence: OFFICIAL official record · GIS lidar/GIS, not a survey · ESTIMATE this report's estimate · CONFIRM still to confirm · CORRECTED corrects the earlier report. Elevations ft NAVD88.

1 · Identification & listing

Address	Lot 441 Waters Edge Dr, Corsicana TX 75109 · The Shores Ph VI OFFICIAL
Legal	T0077.06 THE SHORES ON RICHLAND CHAMBERS LAKE PH VI LOT 441 .531 ACRES OFFICIAL
CAD / Geo	64390 · T0077-06-04410-000-00-0
Owner	Lucia Salas (Coppell) · bought from the developer 16 Jul 2008, Vol 2008 p 6430
Asking	**$105,000** · $197,740/ac · re-listed 9 Oct 2026; a 2025 listing was cut by $25K (Redfin, Apr 2025) OFFICIAL
Listing	MLS 21407991 · Annette Goolsby, Ebby Halliday REALTORS · 972-772-1369 / 903-654-3354 · LakeHouse ad 6000520

2 · CAD value & 2026 tax

CAD 2026	**$70,834** = land $66,753 + steel wall 104 ft (CAD: eff. 2021, 73% good) $4,081 OFFICIAL
Taxable	$70,834
History	2022: $65k → 2023: $79k → 2024: $113k → 2025: $150k → 2026: $71k
2026 tax	**$1,114** at 1.5730% (County .35 · College .1077 · Flood .0054 · R&B .0691 · Mildred ISD 1.0408) OFFICIAL · listing shows $1,206 (listing; matches the 2023 bill) CORRECTED

3 · Plat, boundary & corners

Lot size	**0.531 ac** legal (23,130 sf) · GIS 23,505 sf (0.540 ac) GIS
Lines	road 105 ft · water 105 ft · sides 229 / 221 ft GIS
Plat	Phase VI plat, Vol 7 pp 395–396 (not yet seen)

P1 31.994865, -96.239276	P2 31.994750, -96.239331
P3 31.994592, -96.239389	P4 31.994847, -96.240065
P5 31.995111, -96.239928	

Lat/lon of CAD GIS corners (NAD83). A survey sets the real corners.

4 · Terrain & grading

Ground	low **312.9** · high **330.6** · mean 327.8 ft NAVD88 GIS
Relief	17.8 ft · 95% of the lot above 320 ft (1,141 sf below)
Slope	mean 9.2% · house area 6.9% · max over 50 ft **33% (18.3°)** at the bank
Road→water	226 ft, fall 14.2 ft, direct angle **3.9°**; last 20 ft 22° (40%)
Pad	60×46 ft footprint has 2.1 ft of fall (pad ≈329 ft; ≈42 cy cut+fill) ESTIMATE
Drainage	surface sheets toward the canal (az. 281°); POA requires a driveway culvert

5 · Canal, depth & dock

Frontage	**105 ft** on a canal ≈92 ft wide at 315 ft · steel wall 104 ft (CAD: eff. 2021, 73% good) GIS
Depth	TWDB 2018, within 150 ft: mean **5.9** / max **7.6 ft** at 315 ft (bottom 307.4 ft) → today (312.16 ft) ≈3.1 / 4.8 ft; Dec 2022 low (310.6 ft) ≈3.2 ft max OFFICIAL
Drought	since 2000 the lake was below 312 ft on 27% of days; 2006 low 303.6 ft = canal dry
Dock	TRWD: 8 sf per ft × 105 ft → **max 839 sf** incl. boathouse; ≥5 ft from side lines; deck ≥18 in above 320 ft OFFICIAL
Boating	POA boat ramp and marina (slips sold to members); open lake ≈0.6 mi by canal

6 · Flood

FEMA	X + Zone A on 11% (shore strip) · FIRM 48349C0625D, 5 Jun 2012 OFFICIAL
Levels	TRWD: pool 315 · 100-yr 318 · flowage 320 ft (no building below 320 without SUP)
Floor	proxy: max(318, Zone-A edge 324.0) + 2 ft = **≥326.0 ft** vs pad ≈329 ft → no fill ESTIMATE

7 · Soil & foundation

Soil	Crockett fine sandy loam 1–3% (CrB), 100% OFFICIAL: sandy loam 0–8 in, then **46% clay** to 45 in
Shrink-swell	**high**, LEP 9% · Ksat 0.9 µm/s · densic layer 53 in
Foundation	engineered post-tensioned slab or pier-and-beam; POA requires the engineer's plan; geotech report needed CONFIRM

8 · Septic, water & utilities

Sewer	**none** — on-site septic permitted by TRWD (POA: "start this first") OFFICIAL
System	aerobic unit + subsurface drip; surface spray banned; Ra 0.10 gal/sf/day on clay
Lot size	plat pre-2008, so TRWD's 1-acre rule (lots split after 8 Apr 2011) does not apply; TCEQ ½-acre minimum met CORRECTED
Water	M.E.N. WSC (TX1750015) OFFICIAL · no well needed · tap fee CONFIRM
Power	underground at road (listings); Navarro County Electric Co-op CONFIRM
Other	no natural gas (propane) · internet: fixed wireless / 5G / Starlink

9 · HOA & county rules (same for all three)

HOA	P.O.A. of The Shores, managed by PMI Alliance · dues **$1,255/yr** (MLS) CONFIRM · transfer $200
House	site-built, min 1,800–2,200 sf; 2–5-car garage, doors to side/rear; 6/12 roof; engineer's slab plan
Timing	no deadline to start; exterior done ≤9 months after the slab; approvals lapse after 2 yrs
Use	**no rentals under 90 days**; RV 7 days at a time; boats/trailers enclosed after 3 days
Fees	POA permit $2,750 (<2,500 sf) … $10,000 (≥6,000 sf); boathouse $500–750; pool $2,000
County	SF-3 likely CONFIRM: front 35, rear 15, side 10 ft; ≤40% coverage; 2½ storeys; permit $0.25/sf

10 · Largest home & dock

Footprint	**6,240 sf** incl. 3-car garage (27% cover; the 40% cap would allow 9,252) ESTIMATE
Home	**8,880–9,840 sf** heated, 2 storeys, 6 BR — the drip field is the limit: needs 6,000 sf, room 6,076 sf (50-ft set-back)
Practical	5,000–6,500 sf heated leaves room for a pool and yard; the largest listed Shores home is 4,252 sf
Dock	839 sf covered slip + lift fits the canal

11 · Holding cost per year

2026 tax (actual)	$1,114
HOA dues	$1,255
Mowing (4 required)	$240–480
Liability insurance	$100–200
Total now	**$2,709–$3,049**
After purchase	$2,709–$4,298
Cost of capital 4.5%	$4,725

The CAD may move the value back toward 2025 ($150k → ≈$2,360/yr). Texas's 20% limit on increases covers 2024–2026 only and never passes to a buyer, so it would not cap that jump.

12 · Revised score 7.2/10 earlier 5.9

Price vs value **1**/1.5 · Holding cost **0.6**/1 · Largest home **1.2**/1.5 · Private dock & boating **1.7**/2 · Water depth & drought **0.6**/1 · Buildability & septic **0.7**/1 · Flood & site risk **0.35**/0.5 · Location & access **0.4**/0.5 · Liquidity / resale **0.35**/0.5 · HOA rules **0.35**/0.5

Reasons for each point: page 10.

13 · Alerts for this lot

+ positive · - alert

+ 105 ft of steel-walled canal: the largest dock of the three (839 sf) and no wall to build
+ $1,000 per foot of water, the lowest of the three (442: $1,580/ft)
+ 95% of the lot is above the 320-ft flowage line; the house pad needs no fill
+ Same 7.6-ft maximum depth as 442; canal ≈92 ft wide at 315 ft
+ One owner since buying from the developer in 2008: a short title chain to check
- 11% of the lot (the shore strip) is FEMA Zone A with no base flood elevation: keep every building out of it, or a lender will require flood insurance
- The CAD cut the value 53% in 2026; in 2027 it may go back toward $150k (tax ≈$2,360)
- Highest asking price: $105k is 1.5× the 2026 CAD value
- Bank falls 22° over the last 20 ft: plan steps or a ramp down to the dock
- The CAD dates the wall to 2021 but rates it 73% good: inspect it and ask for its TRWD permit

14 · Before you commit


offer prices are estimates

1. Offer ≈$90–95k with a 21-day option. Cite the $70,834 CAD value and the 2025 price cut.
2. Ask the agent for any survey, the wall's TRWD permit, and any POA violation letters.
3. Survey: 315/320-ft lines, the Zone A line, where the wall stands, and the corners.
4. Septic evaluation: a 6-BR drip field outside Zone A and ≥50 ft from the 315-ft line.
5. Walk away if the wall is unpermitted or off the lot, or the drip field will not fit.

Lot 441 Waters Edge Dr — maps, terrain, largest build & photos

Pictures ≥3.8 in wide · true-north arrows · feet · imagery © Esri, Maxar · listing photos LakeHouse.com (NTREIS)

3.9°	18.3°	22°
road-to-water angle	max over 50 ft	bank, last 20 ft

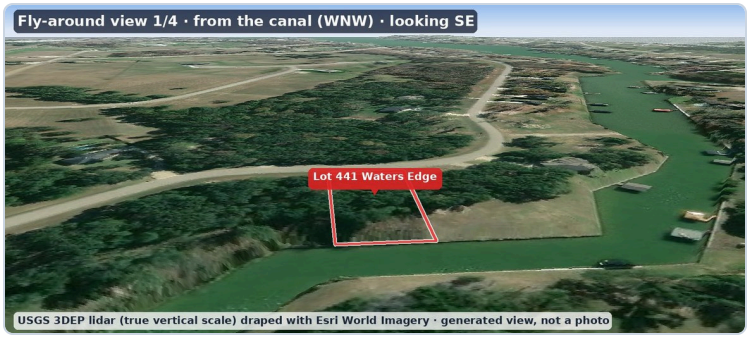


Fly-around 1 — from the canal; lidar 3-D at true scale (replaces realtor.com Fly Around)




Fly-around 2 — from the road, looking toward the water




True-scale plan: 1-ft lidar contours, CAD lot lines, corners, high/low points

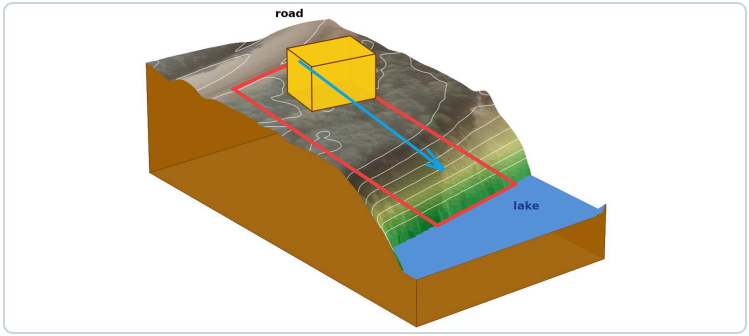

3-D terrain, vertical ×3 (fly-arounds are 1:1): lot line, 5-BR block, fall to water

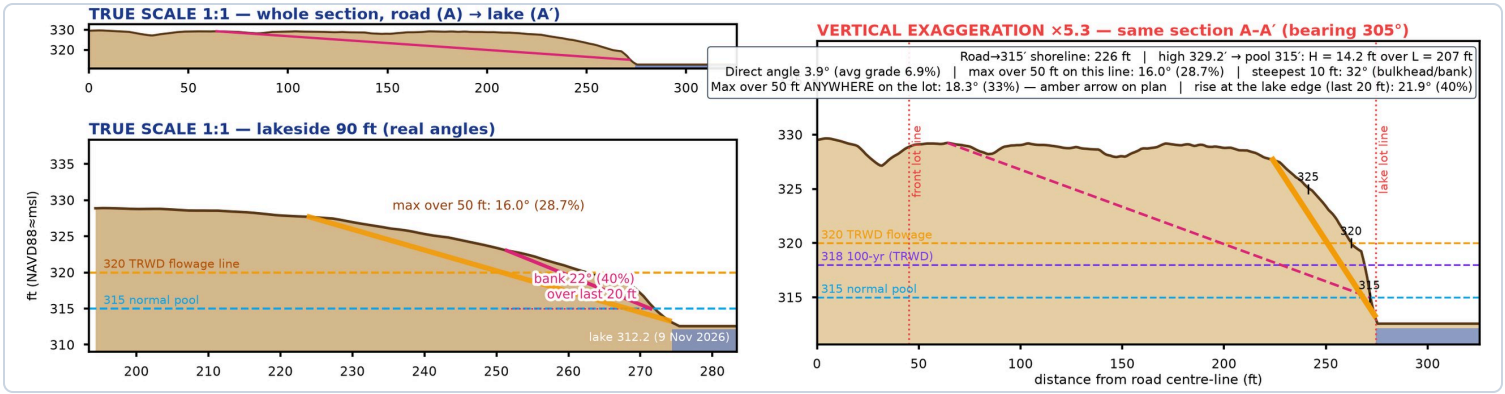


Section road→water: left TRUE 1:1, right stretched. Length 226 ft, height 14.2 ft, direct angle 3.9°, max over 50 ft 18.3°

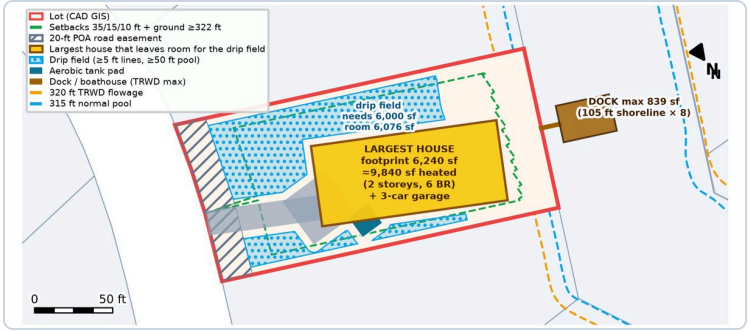


Largest house + dock: set-backs, 40% cap, drip field, tank, dock limit



FEMA flood map (NFHL): Zone A strip along the shore (11% of the lot), Zone X on the high ground

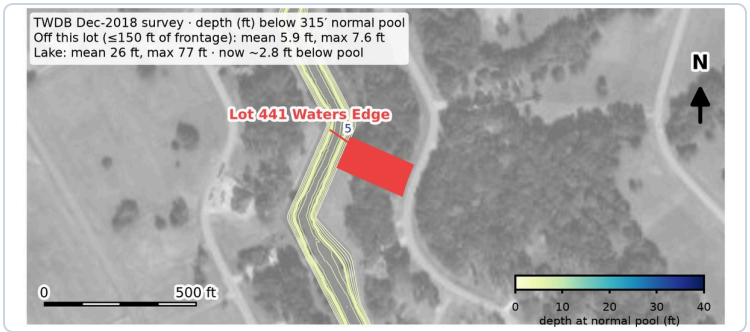

Canal and lake depths (TWDB Dec-2018 survey) below the 315-ft pool

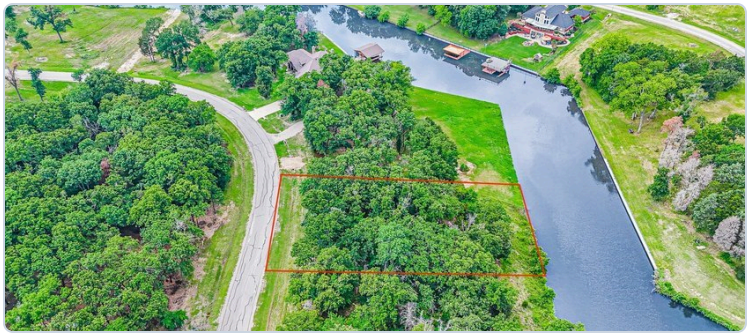


Listing drone photo — lot outline drawn by the broker, canal and steel wall · LakeHouse.com (NTREIS)

Lot 442 Waters Edge Dr, Corsicana TX


The Shores on Richland Chambers Lake, Phase VI · Navarro County · canal lot · MLS 20810887

$94,900	$155,239	0.558 ac	60 ft	313–331	6.6
asking	CAD 2026	24,318 sf GIS	water frontage	ground ft msl	/10 · was 7.2

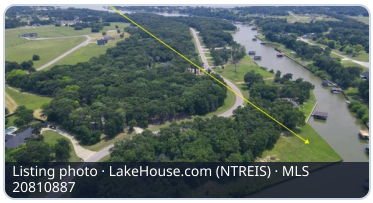

Listing photo · LakeHouse.com (NTREIS) · MLS 20810887



Lot outline on Esri imagery

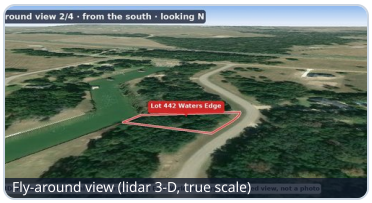

Fly-around view (lidar 3-D, true scale)

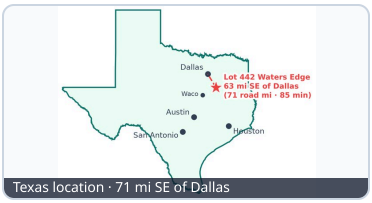

Texas location · 71 mi SE of Dallas

Evidence: OFFICIAL official record · GIS lidar/GIS, not a survey · ESTIMATE this report's estimate · CONFIRM still to confirm · CORRECTED corrects the earlier report. Elevations ft NAVD88.

1 · Identification & listing

Address	Lot 442 Waters Edge Dr, Corsicana TX 75109 · The Shores Ph VI OFFICIAL
Legal	T0077.06 THE SHORES ON RICHLAND CHAMBERS LAKE PH VI LOT 442 .558 ACRES OFFICIAL
CAD / Geo	64391 · T0077-06-04420-000-00-0
Owner	Justin Ray Guerrero & Jennifer Marie Rogas (Arlington) · deed 6 Aug 2021, Vol 2021 p 8967
Asking	**$94,900** · $170,072/ac · on market since ≥7 Jan 2025 at $125,000 → $110,000 → $94,900 (12 Mar 2026) OFFICIAL
Listing	MLS 20810887 · John & Julie Teel, RE/MAX LakeSide Dreams · 903-874-0001 · LakeHouse ad 5680755

2 · CAD value & 2026 tax

CAD 2026	**$155,239** = land $152,885 + steel wall 60 ft (CAD: eff. 2021, 73% good) $2,354 OFFICIAL
Taxable	$142,802 (below market on the roll: ask the CAD why)
History	2022: $68k → 2023: $83k → 2024: $116k → 2025: $156k → 2026: $155k
2026 tax	**$2,246** at 1.5730% (County .35 · College .1077 · Flood .0054 · R&B .0691 · Mildred ISD 1.0408) OFFICIAL · listing shows $1,528 and "est. $2,140" (earlier report) CORRECTED

3 · Plat, boundary & corners

Lot size	**0.558 ac** legal (24,306 sf) · GIS 24,318 sf (0.558 ac) GIS
Lines	road 160 ft · water 60 ft · sides 221 / 226 ft GIS
Plat	Phase VI plat, Vol 7 pp 395–396 (not yet seen)

P1 31.994865, -96.239276	P2 31.995111, -96.239928
P3 31.995261, -96.239850	P4 31.995280, -96.239122
P5 31.995201, -96.239129	P6 31.995098, -96.239162

Lat/lon of CAD GIS corners (NAD83). A survey sets the real corners.

4 · Terrain & grading

Ground	low **312.9** · high **331.3** · mean 329.4 ft NAVD88 GIS
Relief	18.4 ft · 98% of the lot above 320 ft (570 sf below)
Slope	mean 6.8% · house area 5.5% · max over 50 ft **34% (19.0°)** at the bank
Road→water	231 ft, fall 16.2 ft, direct angle **5.0°**; last 20 ft 23° (43%)
Pad	60×46 ft footprint has 1.7 ft of fall (pad ≈330 ft; ≈32 cy cut+fill) ESTIMATE
Drainage	surface sheets toward the canal (az. 277°); POA requires a driveway culvert

5 · Canal, depth & dock

Frontage	**60 ft** on a canal ≈113 ft wide at 315 ft · steel wall 60 ft (CAD: eff. 2021, 73% good) GIS
Depth	TWDB 2018, within 150 ft: mean **6.1** / max **7.6 ft** at 315 ft (bottom 307.4 ft) → today (312.16 ft) ≈3.3 / 4.8 ft; Dec 2022 low (310.6 ft) ≈3.2 ft max OFFICIAL
Drought	since 2000 the lake was below 312 ft on 27% of days; 2006 low 303.6 ft = canal dry
Dock	TRWD: 8 sf per ft × 60 ft → **max 480 sf** incl. boathouse; ≥5 ft from side lines; deck ≥18 in above 320 ft OFFICIAL
Boating	POA boat ramp and marina (slips sold to members); open lake ≈0.6 mi by canal

6 · Flood

FEMA	Zone X; Zone A (no BFE) starts ≈20 ft out, in the canal · FIRM 48349C0625D, 5 Jun 2012 OFFICIAL
Levels	TRWD: pool 315 · 100-yr 318 · flowage 320 ft (no building below 320 without SUP)
Floor	proxy: max(318, Zone-A edge 323.6) + 2 ft = **≥325.6 ft** vs pad ≈330 ft → no fill ESTIMATE

7 · Soil & foundation

Soil	Crockett fine sandy loam 1–3% (CrB), 100% OFFICIAL: sandy loam 0–8 in, then **46% clay** to 45 in
Shrink-swell	**high**, LEP 9% · Ksat 0.9 µm/s · densic layer 53 in
Foundation	engineered post-tensioned slab or pier-and-beam; POA requires the engineer's plan; geotech report needed CONFIRM

8 · Septic, water & utilities

Sewer	**none** — on-site septic permitted by TRWD (POA: "start this first") OFFICIAL
System	aerobic unit + subsurface drip; surface spray banned; Ra 0.10 gal/sf/day on clay
Lot size	plat pre-2008, so TRWD's 1-acre rule (lots split after 8 Apr 2011) does not apply; TCEQ ½-acre minimum met CORRECTED
Water	M.E.N. WSC (TX1750015) OFFICIAL · no well needed · tap fee CONFIRM
Power	underground at road (listings); Navarro County Electric Co-op CONFIRM
Other	no natural gas (propane) · internet: fixed wireless / 5G / Starlink

9 · HOA & county rules (same for all three)

HOA	P.O.A. of The Shores, managed by PMI Alliance · dues **$1,255/yr** (MLS) CONFIRM · transfer $200
House	site-built, min 1,800–2,200 sf; 2–5-car garage, doors to side/rear; 6/12 roof; engineer's slab plan
Timing	no deadline to start; exterior done ≤9 months after the slab; approvals lapse after 2 yrs
Use	**no rentals under 90 days**; RV 7 days at a time; boats/trailers enclosed after 3 days
Fees	POA permit $2,750 (<2,500 sf) … $10,000 (≥6,000 sf); boathouse $500–750; pool $2,000
County	SF-3 likely CONFIRM: front 35, rear 15, side 10 ft; ≤40% coverage; 2½ storeys; permit $0.25/sf

10 · Largest home & dock

Footprint	**6,656 sf** incl. 3-car garage (27% cover; the 40% cap would allow 9,722) ESTIMATE
Home	**10,672 sf** heated, 2 storeys, 6 BR — the drip field is the limit: needs 6,600 sf, room 7,074 sf (50-ft set-back)
Practical	5,000–6,500 sf heated leaves room for a pool and yard; the largest listed Shores home is 4,252 sf
Dock	480 sf covered slip + lift fits the canal

11 · Holding cost per year

2026 tax (actual)	$2,246
HOA dues	$1,255
Mowing (4 required)	$240–480
Liability insurance	$100–200
Total now	**$3,841–$4,181**
After purchase	$3,125–$4,377
Cost of capital 4.5%	$4,270

Tax falls to ≈$1,530 if a 2027 protest uses the price; it rises to ≈$2,440 if the CAD drops the $142,802 taxable figure.

12 · Revised score 6.6/10 earlier 7.2

Price vs value **0.9**/1.5 · Holding cost **0.5**/1 · Largest home **1.3**/1.5 · Private dock & boating **1.2**/2 · Water depth & drought **0.6**/1 · Buildability & septic **0.7**/1 · Flood & site risk **0.4**/0.5 · Location & access **0.4**/0.5 · Liquidity / resale **0.25**/0.5 · HOA rules **0.35**/0.5

Reasons for each point: page 10.

13 · Alerts for this lot

+ positive · - alert

+ Widest canal (≈113 ft at 315 ft) and the best mean depth (6.1 ft at full pool)
+ Largest house footprint of the three: 6,656 sf, ≈10,700 sf heated in theory
+ Whole lot in FEMA Zone X; 98% of it above 320 ft
+ 672 days on the market after $30k of cuts: the seller has reason to negotiate
- Only 60 ft touches the water, so TRWD allows at most a 480-sf dock (one covered slip + lift)
- The CAD values it at $155k, 2.2× the per-acre value of most neighbours; tax $2,246, twice 441's
- Taxed on $142,802 although the CAD shows $155,239 with no cap or exemption: ask the CAD why. On $155k the tax would be ≈$2,440
- Wedge shape: 160 ft at the road, 60 ft at the water; bank 23° over the last 20 ft, 34° over the steepest 10 ft

14 · Before you commit

offer prices are estimates

1. Offer ≈$80–85k with a 21-day option; the time on market and two cuts support it.
2. Protest the 2027 value with the sale price. Texas deadline: 15 May, or 30 days after the notice.
3. Ask TRWD whether 480 sf fits your boat, lift and any boathouse roof.
4. Survey: confirm 60 ft at the 315-ft line and room for the 5-ft side clearances.
5. Walk away if the dock limit is too small for your boat.

Lot 442 Waters Edge Dr — maps, terrain, largest build & photos

Pictures ≥3.8 in wide · true-north arrows · feet · imagery © Esri, Maxar · listing photos LakeHouse.com (NTREIS)

5.0°	19.0°	23°
road-to-water angle	max over 50 ft	bank, last 20 ft




Fly-around 1 — from the canal; lidar 3-D at true scale (replaces realtor.com Fly Around)




Fly-around 2 — from the road, looking toward the water




True-scale plan: 1-ft lidar contours, CAD lot lines, corners, high/low points

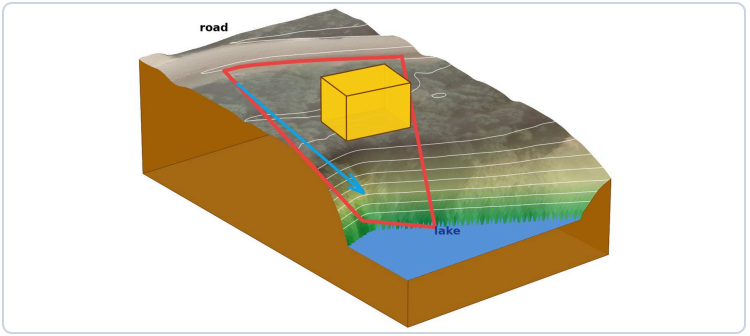

3-D terrain, vertical ×3 (fly-arounds are 1:1): lot line, 5-BR block, fall to water

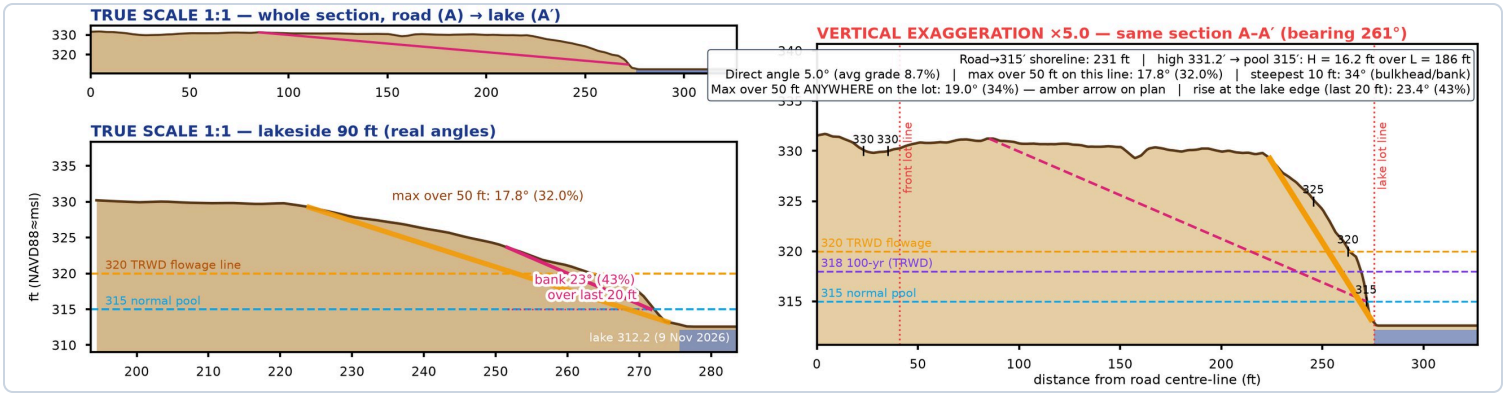


Section road→water: left TRUE 1:1, right stretched. Length 231 ft, height 16.2 ft, direct angle 5.0°, max over 50 ft 19.0°

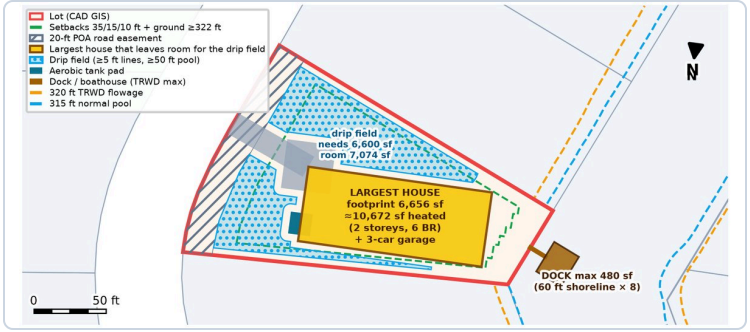

Largest house + dock: set-backs, 40% cap, drip field, tank, dock limit



FEMA flood map (NFHL): Zone A in the canal, the whole lot in Zone X

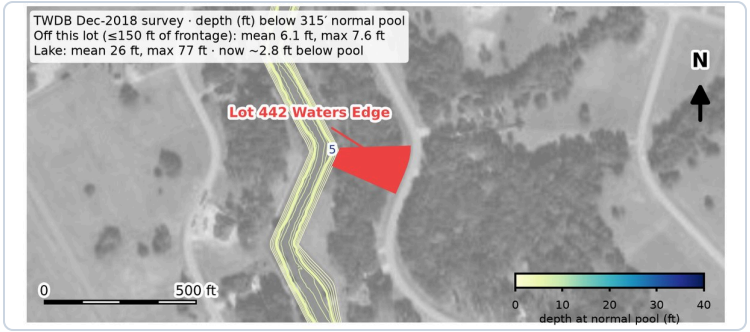

Canal and lake depths (TWDB Dec-2018 survey) below the 315-ft pool



Listing drone photo — lot lines drawn by the broker (approximate) · LakeHouse.com (NTREIS)

Lot 411 Sailboat Dr, Corsicana TX

The Shores on Richland Chambers Lake, Phase V · Navarro County · canal lot · MLS 21334950


$65,000	$89,720	0.500 ac	35–96 ft	321–336
asking	CAD 2026	21,314 sf GIS	water frontage	ground ft msl

6.0 /10 · was 6.8



Listing photo · LakeHouse.com (NTREIS) · MLS 21334950



Lot outline on Esri imagery

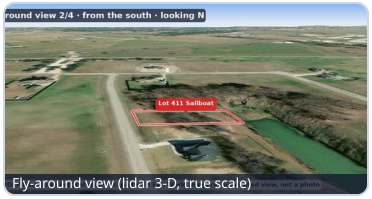

Fly-around view (lidar 3-D, true scale)

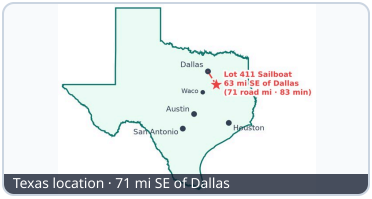

Texas location · 71 mi SE of Dallas

Evidence: OFFICIAL official record · GIS lidar/GIS, not a survey · ESTIMATE this report's estimate · CONFIRM still to confirm · CORRECTED corrects the earlier report. Elevations ft NAVD88.

1 · Identification & listing

Address	Lot 411 Sailboat Dr, Corsicana TX 75109 · The Shores Ph V OFFICIAL
Legal	T0077.05 THE SHORES ON RICHLAND CHAMBERS LAKE PH V LOT 411 .5 ACRES OFFICIAL
CAD / Geo	64288 · T0077-05-04110-000-00-0
Owner	Tawney Randell (Odessa) · deed 30 Aug 2023, Vol 2023 p 8227
Asking	**$65,000** · $130,000/ac · listed 17 Jul 2026 at $65,000, no price change OFFICIAL
Listing	MLS 21334950 · Leslie Melton, eXp Realty · 888-519-7431 · LakeHouse ad 7555161

2 · CAD value & 2026 tax

CAD 2026	**$89,720** = land $88,645 + steel wall 100 ft (CAD: built 2010, 20% good) $1,075 OFFICIAL
Taxable	$89,720
History	2022: $44k → 2023: $35k → 2024: $67k → 2025: $90k → 2026: $90k
2026 tax	**$1,411** at 1.5730% (County .35 · College .1077 · Flood .0054 · R&B .0691 · Mildred ISD 1.0408) OFFICIAL · listing shows $1,029 (listing; matches the 2024 bill) CORRECTED

3 · Plat, boundary & corners

Lot size	**0.500 ac** legal (21,780 sf) · GIS 21,314 sf (0.489 ac) GIS
Lines	road 102 ft · water 95 ft · sides 217 / 216 ft GIS
Plat	Phase V plat, Vol 7 p 397 (excerpt in listing photo 30) — east line on the "Revised 315 Deed Line"; the canal is a separate tract CORRECTED

P1 31.993974, -96.230985	P2 31.993713, -96.231005
P3 31.993753, -96.231703	P4 31.994032, -96.231679

Lat/lon of CAD GIS corners (NAD83). A survey sets the real corners.

4 · Terrain & grading

Ground	low **321.2** · high **336.4** · mean 333.4 ft NAVD88 GIS
Relief	15.2 ft · 100% of the lot above 320 ft (0 sf below)
Slope	mean 7.4% · house area 6.1% · max over 50 ft **24% (13.3°)** at the bank
Road→water	235 ft, fall 21.2 ft, direct angle **5.8°**; last 20 ft 24° (44%)
Pad	60×46 ft footprint has 1.7 ft of fall (pad ≈335 ft; ≈45 cy cut+fill) ESTIMATE
Drainage	surface sheets toward the canal (az. 88°); POA requires a driveway culvert

5 · Canal, depth & dock

Frontage	plat line 95.8 ft on the canal tract; open water **25–33 ft** beyond the line, ≈35 ft of it opposite the lot; canal head vegetated/silted CORRECTED
Depth	TWDB 2018, within 150 ft: mean **5.5** / max **6.0 ft** at 315 ft (bottom 309.0 ft) → today (312.16 ft) ≈2.7 / 3.2 ft; Dec 2022 low (310.6 ft) ≈1.6 ft max OFFICIAL
Drought	since 2000 the lake was below 312 ft on 27% of days; 2006 low 303.6 ft = canal dry
Dock	TRWD: 8 sf per ft of shoreline → **280–766 sf** (35 ft of open water vs 95.8 ft plat line; TRWD decides) CONFIRM
Boating	POA boat ramp and marina (slips sold to members); open lake ≈0.6 mi by canal

6 · Flood

FEMA	Zone X; the canal beside the lot is not mapped; nearest Zone A ≈860 ft away · FIRM 48349C0625D, 5 Jun 2012 OFFICIAL
Levels	TRWD: pool 315 · 100-yr 318 · flowage 320 ft (no building below 320 without SUP)
Floor	TRWD 100-yr 318 ft + 2 ft = **≥320.0 ft** vs pad ≈335 ft → no fill ESTIMATE

7 · Soil & foundation

Soil	Crockett fine sandy loam 1–3% (CrB), 100% OFFICIAL: sandy loam 0–8 in, then **46% clay** to 45 in
Shrink-swell	**high**, LEP 9% · Ksat 0.9 µm/s · densic layer 53 in
Foundation	engineered post-tensioned slab or pier-and-beam; POA requires the engineer's plan; geotech report needed CONFIRM

8 · Septic, water & utilities

Sewer	**none** — on-site septic permitted by TRWD (POA: "start this first") OFFICIAL
System	aerobic unit + subsurface drip; surface spray banned; Ra 0.10 gal/sf/day on clay
Lot size	pre-2008 plat ✓; legal 0.500 ac meets TCEQ ½ ac, GIS 0.487 ac — survey to confirm CONFIRM
Water	M.E.N. WSC (TX1750015) OFFICIAL · no well needed · tap fee CONFIRM
Power	underground at road (listings); Navarro County Electric Co-op CONFIRM
Other	no natural gas (propane) · internet: fixed wireless / 5G / Starlink

9 · HOA & county rules (same for all three)

HOA	P.O.A. of The Shores, managed by PMI Alliance · dues **$1,255/yr** (MLS) CONFIRM · transfer $200
House	site-built, min 1,800–2,200 sf; 2–5-car garage, doors to side/rear; 6/12 roof; engineer's slab plan
Timing	no deadline to start; exterior done ≤9 months after the slab; approvals lapse after 2 yrs
Use	**no rentals under 90 days**; RV 7 days at a time; boats/trailers enclosed after 3 days
Fees	POA permit $2,750 (<2,500 sf) ... $10,000 (≥6,000 sf); boathouse $500–750; pool $2,000
County	SF-3 likely CONFIRM: front 35, rear 15, side 10 ft; ≤40% coverage; 2½ storeys; permit $0.25/sf

10 · Largest home & dock

Footprint	**5,632 sf** incl. 3-car garage (26% cover; the 40% cap would allow 8,712) ESTIMATE
Home	**8,496–8,624 sf** heated, 2 storeys, 6 BR — the drip field is the limit: needs 6,000 sf, room 6,020 sf (50-ft set-back)
Practical	5,000–6,500 sf heated leaves room for a pool and yard; the largest listed Shores home is 4,252 sf
Dock	280–766 sf; walkway crosses 25–35 ft of canal tract; needs dredging for a lift

11 · Holding cost per year

2026 tax (actual)	$1,411
HOA dues	$1,255
Mowing (4 required)	$240–480
Liability insurance	$100–200
Total now	**$3,006–$3,346**
After purchase	$2,634–$3,346
Cost of capital 4.5%	$2,925

Tax falls to ≈$1,040 if the CAD follows the price.

12 · Revised score 6.0/10 earlier 6.8

Price vs value **1.2**/1.5 · Holding cost **0.7**/1 · Largest home **1**/1.5 · Private dock & boating **0.6**/2 · Water depth & drought **0.3**/1 · Buildability & septic **0.7**/1 · Flood & site risk **0.45**/0.5 · Location & access **0.4**/0.5 · Liquidity / resale **0.3**/0.5 · HOA rules **0.35**/0.5

Reasons for each point: page 10.

13 · Alerts for this lot

+ positive · - alert

+ Lowest price: $65k, $130k per acre
+ Whole lot above 320 ft (321–336 ft) and in Zone X: the highest, driest ground of the three
+ Simple rectangle with 102 ft on Sailboat Dr
- The lot stops at the canal tract's 315-ft deed line; open water is 25–33 ft further out
- Shallowest water: 5.5 / 6.0 ft (mean / max) at full pool, ≈2.7 / 3.2 ft now, ≤1.6 ft at the Dec 2022 low
- Silted, overgrown canal head: dredging needs TRWD approval (perhaps a USACE permit too); who pays is unknown
- The CAD's 100-ft wall dates from 2010 and is rated 20% good: budget to repair or replace it
- GIS area 0.487 ac vs legal 0.500 ac: the TCEQ half-acre septic minimum is at the margin

14 · Before you commit

offer prices are estimates

1. Before any offer, get TRWD's written answer: which shoreline counts, whether a walkway may cross the canal tract, and who may dredge.
2. Ask the POA who owns the canal tract and whether owners may cross it.
3. Offer ≈$55–60k, subject to TRWD's dock approval. The Shores' 1-acre off-water lots ask $60–70k.
4. Survey: confirm 0.500 ac (septic minimum) and where the 2010 wall stands.
5. Walk away if TRWD will not allow a dock that reaches open water.

Lot 411 Sailboat Dr — maps, terrain, largest build & photos

Pictures ≥3.8 in wide · true-north arrows · feet · imagery © Esri, Maxar · listing photos LakeHouse.com (NTREIS)

5.8°	13.3°	24°
road-to-water angle	max over 50 ft	bank, last 20 ft




Fly-around 1 — from the canal; lidar 3-D at true scale (replaces realtor.com Fly Around)




Fly-around 2 — from the road, looking toward the water




True-scale plan: 1-ft lidar contours, CAD lot lines, corners, high/low points

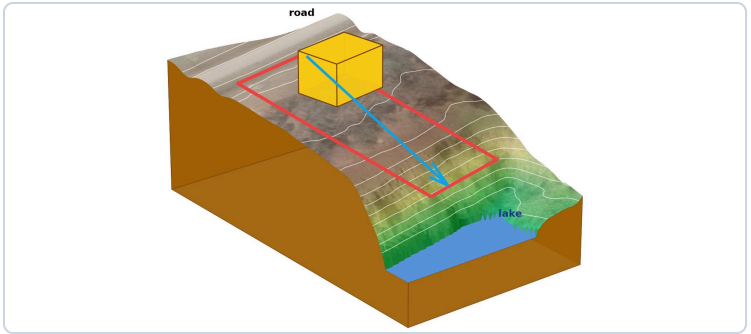

3-D terrain, vertical ×3 (fly-arounds are 1:1): lot line, 5-BR block, fall to water

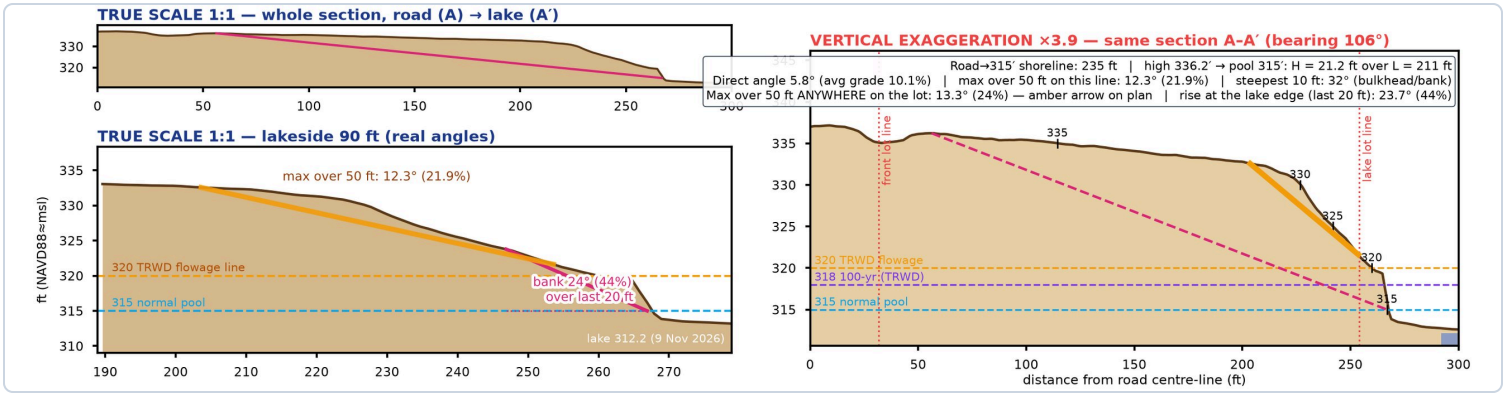


Section road→water: left TRUE 1:1, right stretched. Length 235 ft, height 21.2 ft, direct angle 5.8°, max over 50 ft 13.3°

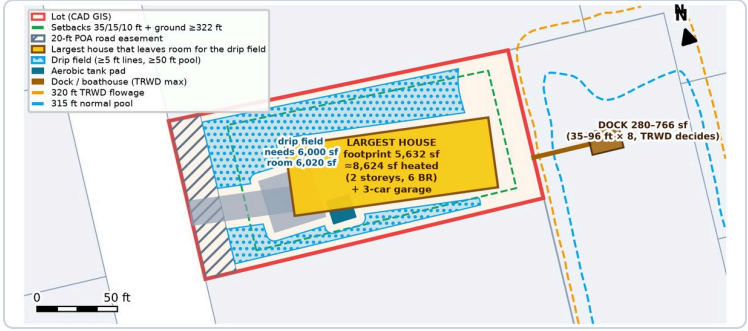


Largest house + dock: set-backs, 40% cap, drip field, tank, dock limit



FEMA flood map (NFHL): no Zone A in this view: the lot and this canal are Zone X (nearest Zone A ≈860 ft)

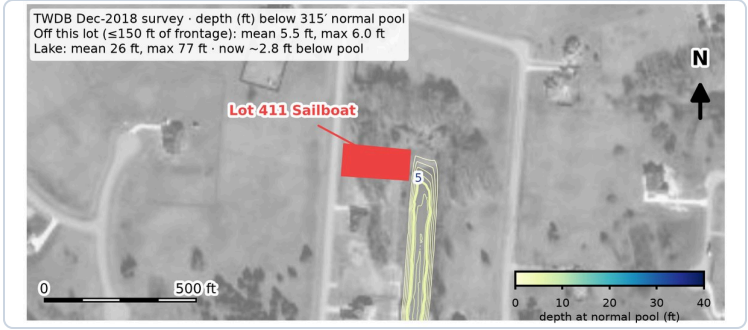

Canal and lake depths (TWDB Dec-2018 survey) below the 315-ft pool

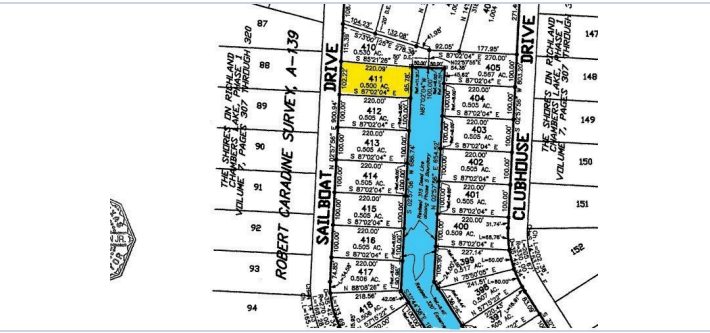

Plat excerpt (listing): east line 95.78 ft on the "Revised 315 Deed Line" · LakeHouse.com (NTREIS)

What changed — the earlier report checked against the records

CAD, tax portal, HOA documents, TRWD/TCEQ rules, plat, TWDB survey · each row names its source

Topic	Earlier 3-lot report	Verified now	Source	Effect
CAD values	Used 2026 land values as "value": 442 $152,885, 411 $88,645, 441 $66,753; "county record not read"	Same land values, read from navarrocad.com. Full 2026 market: 442 $155,239, 411 $89,720, 441 $70,834. Lot 442 is taxed on $142,802	Navarro CAD records 64391, 64288, 64390	Values are right, but they are not a fair yardstick (next row)
CAD consistency	Ranked 442 first partly on asking "0.62× CAD"	In 2026 the CAD cut the land value of Phase VI canal lots 439, 441, 443 and 445 by 48–57% and 446–447 by 22%, but left 442 and 444 at 2025 levels. Lot 442 now carries $274k/ac against $119–126k/ac next door	CAD roll history, 8 neighbours	Price-vs-CAD flatters 442 and punishes 441; scored on asking $/canal-ft instead
Property tax	442 "est. $2,140" / $1,528; 411 $1,029; 441 $1,206	2026 adopted bills: 442 $2,246, 411 $1,411, 441 $1,114 at 1.5730% (County .35, College .1077, Flood .0054, R&B .0691, Mildred ISD 1.0408)	texastaxtransparency.com (Navarro), 2026 adopted rates	Listing figures are 2023–24 bills
Tax after you buy	Not covered	Texas's 20% limit on non-homestead increases covers tax years 2024–2026 only and never passes to a buyer, so nothing caps a 2027 reset. 441 can go back toward its 2025 value ($150k → ≈$2,360/yr); 442 can be protested toward the price (≈$1,530/yr). 442 is taxed on $142,802 though the CAD lists $155,239 with no cap loss	Tex. Tax Code §23.231; CAD and tax-portal records	Holding cost is a range, not one figure
HOA dues	441/442 $1,255; 411 "$1,000 listed, $1,225–1,255 reported"	$1,255/yr per lot on the MLS (442 and Lot 249). Transfer fee $200. The 411 figure looks out of date	LakeHouse/MLS 20810887, HAR 21129188, HOA certificate 2022	Ask PMI Alliance for a resale certificate
Septic lot size	"TRWD needs ≥1 ac if platted after 8 Apr 2011 … confirm"; county 1 ac on clay	Phases V/VI were platted before July 2008. The developer sold these lots on 2 Jul and 16 Jul 2008, so the TRWD 1-acre rule does not apply. TCEQ's ½-acre minimum is met. TRWD, not the county, permits septic here	TRWD OSSF Guidelines 2026 §3.03(c); CAD deed history; TCEQ 30 TAC 285.4	Half-acre septic is allowed: aerobic + drip
Drip-field set-back	75 ft from water (5-BR, 3,600 sf)	TCEQ Table X: 25 ft when Ra<0.1, 75 ft when Ra>0.1, 50 ft with treatment + disinfection. Clay is exactly 0.1, so this report checks both 50 and 75 ft	30 TAC 285.91(10)	House size is limited by the drip field, not by zoning
Canal depth	"Lake max 75 ft, mean ≈27 ft; canal depth not surveyed"	TWDB boat survey (Dec 2018) did sound the canals: 442 6.1/7.6 ft, 441 5.9/7.6 ft, 411 5.5/6.0 ft (mean/max at 315 ft). Today (312.16 ft) about 2.8 ft less	TWDB 2018 volumetric survey soundings	Boat lifts are marginal at 411
Lot 411 water frontage	"Canal-head waterfront", dock ≤8 sf/ft of owned shoreline	Plat: east line 95.78 ft runs on the "Revised 315 Deed Line" of a separate canal tract. Lidar puts that line at ≈321 ft. Open water starts 25–33 ft further out and touches only ≈35 ft opposite the lot	Plat excerpt (listing photo 30); USGS lidar	Dock 280–766 sf: TRWD must say which length counts
Lot 411 wall	Not mentioned	CAD taxes a 100-ft steel wall, built 2010, at 20% condition. Its location is unknown	CAD record 64288	Inspect it; replacing it would cost $30–70k (estimate)
Building permit fee	"$0.50/sf"	$0.25 per sf of HVAC area + three third-party inspections + $100 address application	Navarro County 2025 building-permit package	≈$1,250 for a 5,000 sf house
Short-term rental	"County has no STR permit … CC&Rs govern"	HOA bans leases under 90 days and fines them (20th Supplement, Exhibit A5, approved 6 Jun 2026)	POA of The Shores dedicatory instruments	No Airbnb income
HOA build rules	Minimum 1,800–2,200 sf	Also: 2- to 5-car garage with side/rear doors, 6/12 roof, engineer's foundation plan, exterior done within 9 months of the slab, approval lapses after 2 years, POA permit fee $2,750–$10,000 by size	20th Supplement, Exhibits A1, A2, A4	Large homes are expected and allowed
Days on market	442 ≈665 days; 411 ≈100; 441 "n/a, no history"	442: 672 days (since ≥7 Jan 2025). 411: 116 days. 441: re-listed 9 Oct 2026 after a 2025 listing that was cut by $25k	Homes.com (via earlier report), LakeHouse, Redfin snippet	Room to negotiate on 442 and 441
Lake level	312.33 ft on 25 Oct 2026	312.16 ft on 9 Nov 2026 (2.8 ft below full pool)	TWDB Water Data for Texas	—
Water supplier	M.E.N. WSC (co-op)	Confirmed: M.E.N. WSC, PWS TX1750015, for all three lots	TWDB service-area map	No well needed
Sizes	442 0.558 ac, 411 0.500 ac (GIS 0.489), 441 0.531 ac (GIS 0.539)	Legal acreage confirmed. GIS: 442 24,318 sf, 411 21,314 sf (-2%), 441 23,505 sf (+1.6%)	CAD + TxGIO parcels	A survey settles 411's exact area
Flood zones	442 X; 411 X; 441 X 89% / A 11%	Same, FIRM 48349C0625D (5 Jun 2012). No BFE is published	FEMA NFHL	Confirmed

Navarro CAD land values, Phase VI canal lots (2025 → 2026)

Lot	acres	2025	2026	2026 $/ac	change
439	0.505	$162,790	$84,648	$167,620	-48%
441	0.531	$145,490	$66,753	$125,712	-54%
442	0.558	$152,880	$152,885	$273,987	no change
443	0.558	$152,880	$68,348	$122,487	-55%
444	0.505	$138,370	$138,367	$273,994	no change
445	0.505	$138,370	$60,231	$119,269	-56%
446	0.681	$98,780	$76,830	$112,819	-22%
447	0.590	$85,580	$66,563	$112,819	-22%

Six of eight lots were cut 22–57%; 442 and 444 were not. Lot 411 (Phase V) went from $88,650 to $88,645.

Actual holding cost per year (before building)

Lot	2026 tax	HOA	mow+ins.	now	after purchase
441	$1,114	$1,255	$340–680	**$2,709–$3,049**	$2,709–$4,298
442	$2,246	$1,255	$340–680	**$3,841–$4,181**	$3,125–$4,377
411	$1,411	$1,255	$340–680	**$3,006–$3,346**	$2,634–$3,346

Tax is the 2026 adopted bill. HOA dues are from the MLS. Mowing (4 required) and liability cover are estimates. "After purchase" covers a protest to the price (442), or the CAD resetting 441 toward its 2025 value. Add 4.5% of the price for the cost of capital if you want an investor view.

Market check — The Shores, 10 Nov 2026

Lots for sale		asking
480 Canal St	0.52 ac lakefront	$189,000
Lot 229 The Shores Dr	0.80 ac peninsula, 100 ft wall	$530,000
Lot 109 Waters Edge Dr	1.02 ac canal view, off-water	$69,900
Lot 119 Waters Edge Dr	1.02 ac off-water + boat slip	$100,000
Lot 77 Clubhouse Dr	1.02 ac interior + boat slip	$75,000
Lots 72 / 139 Clubhouse Dr	1.02 ac interior	$60,000
Homes		
574 Clubhouse Dr	4,252 sf, 5 BR, 0.62 ac, open water	$2,290,000
908 Sailboat Dr	3,267 sf, 4 BR, 1.01 ac	$1,875,000
205 Canal St	0.50 ac canal lot, home + guest apt	$957,000
902 Waters Edge Dr	3,350 sf, 4 BR, 1.03 ac — sold 8 Jul 2026	$1,176,100

Texas does not publish sale prices. Ask the agents for MLS sold data on canal lots.

Largest home and private dock — feasibility, budget and first steps

Navarro County SF-3 rules, POA ACC rules, TRWD 2026 dock and septic guidelines, TCEQ 30 TAC 285 · drawings on each lot's page 2

Largest home & private dock	Lot 441 Waters Edge Dr	Lot 442 Waters Edge Dr	Lot 411 Sailboat Dr
Lot area (legal / GIS)	23,130 / 23,505 sf	24,306 / 24,318 sf	21,780 / 21,314 sf
County cover cap 40%	9,252 sf (not the limit)	9,722 sf (not the limit)	8,712 sf (not the limit)
Buildable envelope	14,063 sf (set-backs + ground ≥322 ft)	14,265 sf (set-backs + ground ≥322 ft)	13,012 sf (set-backs + ground ≥322 ft)
Largest footprint	**6,240 sf** incl. 3-car garage + porches	**6,656 sf** incl. 3-car garage + porches	**5,632 sf** incl. 3-car garage + porches
Largest heated area	**9,840 sf** (50-ft drip set-back) · 8,880 sf (75-ft)	**10,672 sf** (50-ft drip set-back) · 10,672 sf (75-ft)	**8,624 sf** (50-ft drip set-back) · 8,496 sf (75-ft)
Septic for that house	600 gal/day → drip 6,000 sf, room 6,076 sf	660 gal/day → drip 6,600 sf, room 7,074 sf	600 gal/day → drip 6,000 sf, room 6,020 sf
Practical large home	5,000–6,500 sf, 6 BR, pool fits beside a 4,800 sf drip field	5,000–6,500 sf, 6 BR, pool fits beside a 4,800 sf drip field	5,000–6,500 sf, 6 BR, pool fits beside a 4,800 sf drip field
Largest dock	**839 sf** (8 sf × 105 ft)	**480 sf** (8 sf × 60 ft)	**280–766 sf, TRWD decides**
Water at the dock today	≈3.1–4.8 ft (Dec-2022 low: ≤3.2 ft)	≈3.3–4.8 ft (Dec-2022 low: ≤3.2 ft)	≈2.7–3.2 ft (Dec-2022 low: ≤1.6 ft)
Feasible?	**Yes** — biggest dock; wall exists	**Yes** — dock limited to 480 sf	**Conditional** — TRWD dock length + dredging

What limits the size of the house

County	SF-3 (to confirm CONFIRM): set-backs 35 ft front, 15 ft rear (water side), 10 ft sides; buildings ≤40% of the lot; main + accessory buildings ≤50% of the rear half; 2½ storeys; nothing below 320 ft
POA	site-built; at least 1,800–2,200 sf; 2- to 5-car garage with side or rear doors; 6/12 roof; engineer's foundation plan; first 20 ft beside the road is a POA easement; exterior done 9 months after the slab
Septic	TRWD permits it (TCEQ rules). Flow for 6 BR is 420 gal/day up to 5,500 sf heated, +60 per extra 1,500 sf. Drip area = flow ÷ 0.10, so 4,200–4,800 sf for a 5,000–6,500 sf home and 6,000–6,600 sf for the theoretical maximum. It must stay ≥5 ft from lot lines and 50–75 ft from the 315-ft line
Result	**the drip field runs out of room before zoning does**: the largest houses cover only 26–27% of the lots against a 40% cap

Dock and boathouse rules (TRWD Attachment I, 5 Feb 2026)

Permit	needed for any dock, boathouse, wall, patio, pool or dredging on TRWD land or water: $300; review 10 business days + up to 30 more
Size	8 sf per foot of shoreline up to 150 ft (max 1,200 sf), measured at the end of the walkway incl. any roof overhang >2 ft; one walkway ≤8 ft wide is not counted
Placement	≥5 ft from side lines. A side-entry slip must sit 1.5× its length from the property line, so 60 ft (442) suits a straight-in slip only. It must not block navigation
Build	not enclosed (one 20-sf store allowed); roof ≤6/12; ≤2 storeys; no toilet or living space; lower deck ≥18 in above 320 ft, i.e. ≥6.5 ft above full pool, so plan a boat lift; light at the end if >50 ft out
Dredging	own permit; side slopes ≤10%, no holes (needed at 411's canal head)

How the largest-home figure was found

A computer search tried house rectangles from 44 × 36 ft to 128 × 108 ft, turned 6 ways and moved in 6-ft steps, keeping those inside the set-backs and on ground ≥322 ft. It took the largest one that still leaves room for the drip field, a driveway, a side-entry apron and the tank pad. Each house includes a 960-sf 3-car garage and 360 sf of porches; heated area = 2 storeys × the rest. Drawings: each lot's page 2. ESTIMATE

Budget for a 5,000–6,500 sf, 6-BR lake home (2026 estimate)

Item	range
House, custom, $275–350/sf (Shores homes sell at $290–575/sf incl. land)	$1.38–2.28M
Engineered foundation on high-shrink clay (extra over a plain slab)	$30–60k
Aerobic septic + drip, 420–540 gal/day	$30–45k
Covered dock/boathouse 480–839 sf + lift (≈$90–140/sf)	$45–115k
Driveway, culvert, clearing, water tap, electric	$25–50k
Permits: POA $6–10k, county $0.25/sf, TRWD $400 + $300, inspections	$9–14k
Design, survey, geotech, septic design	$40–90k
Total excluding the lot	**≈$1.56–2.66M**

ESTIMATE Get two builder bids. The theoretical maximum (8,500–10,700 sf) would cost ≈$2.5–3.8M, about twice the most expensive Shores listing.

Initial steps and money to spend before you commit

1. **Free, this week:** e-mails to the three listing agents, PMI Alliance (HOA), TRWD, Navarro County Planning, M.E.N. WSC and NCEC. Ask TRWD for the shoreline length and dock limit, in writing.
2. **Free:** drive the canals at today's low level (312.2 ft) and look at the walls and depth at each lot.
3. **Option period (21 days), $200–500:** make the offer on #1 subject to the items below.
4. **$2,000–4,000:** boundary + 1-ft topo survey showing the 315/320 lines, the wall, and trees ≥10 in.
5. **$750–1,500:** septic site evaluation and a sketch layout for 420–540 gal/day.
6. **$1,800–3,000:** geotech borings + PVR (can wait until after closing if the option is short).
7. **≈$375 + $200:** HOA resale certificate (dues, assessments, violations) and transfer fee.
8. **$0 until closing:** title commitment; read every easement and the CC&Rs for Phase V/VI.
9. **Then decide.** Total at risk on one lot ≈$5–9k. Do steps 1–2 for all three lots, steps 3–8 only for #1.

Positives

- Gated community with pool, gym, ramp, marina and paved roads; Mildred ISD.
- Public water (M.E.N. WSC) and underground power at the road.
- Pre-2011 plats: half-acre septic is allowed; no deadline to start building.
- 441 and 442 already have 2021 steel walls (saves $30–70k).
- No fill needed: the house pads (≈329–335 ft) sit 9–15 ft above the 320-ft flowage line.

Alerts

- **Shallow canals:** in a 2006-type drought (303.6 ft) all three canals go dry.
- **411:** the lot does not reach open water; the 2010 wall is at 20% condition.
- **Tax swings:** 442 is over-valued by the CAD; 441's 2026 cut will likely reverse after sale.
- **Rules:** no rentals under 90 days; exterior in 9 months; 4 mowings a year while vacant.
- **Clay:** LEP 9% — budget an engineered foundation and keep trees ≥15 ft from the slab.
- **Services:** hospital 33 min, groceries 28 min (Corsicana); tornado and hail are the main hazards.

Revised scores · open questions · glossary · sources · end note

Checklists (61 items per lot) and 12 e-mail drafts are in the companion PDF: The-Shores-3-Lots-Checklists-and-Emails_10-Nov-26_Claude-Opus-5.5.pdf

Revised holding score — points and reasons

Criterion (max)	Lot 441 Waters Edge Dr	Lot 442 Waters Edge Dr	Lot 411 Sailboat Dr
Price vs value (1.5)	**1** $105k = $198k/ac but $1,000 per canal-ft (best)	**0.9** $94.9k = $170k/ac, $1,580 per canal-ft (highest); 672 days, two cuts	**1.2** $65k = $130k/ac, cheapest; priced like an interior lot
Holding cost (1)	**0.6** $2.7–4.3k/yr; tax likely rises after sale	**0.5** $3.1–4.4k/yr; tax $2,246 on an out-of-line CAD value	**0.7** $2.6–3.3k/yr
Largest home (1.5)	**1.2** ≈8,900–9,800 sf	**1.3** septic-limited max ≈10,700 sf heated	**1** ≈8,500 sf; smallest lot (GIS 0.487 ac)
Private dock & boating (2)	**1.7** 839 sf max (105 ft); wall; canal ≈92 ft	**1.2** 480 sf max (60 ft); widest canal ≈113 ft; wall	**0.6** 280–766 sf, TRWD to decide; silted canal head
Water depth & drought (1)	**0.6** 5.9 / 7.6 ft at full pool, ≈3.1 / 4.8 ft now	**0.6** 6.1 / 7.6 ft at full pool, ≈3.3 / 4.8 ft now	**0.3** 5.5 / 6.0 ft at full pool, ≈2.7 / 3.2 ft now
Buildability & septic (1)	**0.7** pad 2 ft of fall; clay; drip fits	**0.7** pad 2 ft of fall; clay; drip fits	**0.7** all ≥321 ft; rectangle; clay
Flood & site risk (0.5)	**0.35** 11% Zone A strip at the shore	**0.4** Zone X; steep 23° bank	**0.45** Zone X; whole lot above 320 ft
Location & access (0.5)	**0.4** same	**0.4** same gated community: 71 mi Dallas, 1.2 mi VFD	**0.4** same
Liquidity / resale (0.5)	**0.35** 105 ft of walled canal is the easiest resale	**0.25** unsold for 22 months	**0.3** weak water access limits buyers
HOA rules (0.5)	**0.35** same	**0.35** no rentals <90 days; 9-month build; mowing	**0.35** same
Total (earlier)	**7.2** (5.9)	**6.6** (7.2)	**6.0** (6.8)

The weights favour your goal (large home + private dock): dock and boating 2.0, largest home 1.5, price 1.5. The earlier report weighted price vs CAD at 20% and gave 441 a 2/10 on a CAD value the district had just halved.

Still to confirm, and who answers (e-mail drafts in the companion PDF)

TRWD	shoreline length and dock limit for each lot (decides 411); permits for the three walls; drip set-back 50 or 75 ft; whether 411's canal head may be dredged
POA / PMI	2026–27 dues, assessments and violations (resale certificate); CC&R set-backs and height; who owns the canal tract beside 411
County	zoning district (SF-3?), which line is the rear on a canal lot, guest-house rules, permit fees
CAD	why 442 is taxed on $142,802; why 441 and its neighbours were cut; how 2027 values will be set
Surveyor	corners, the 315/320-ft lines, where each wall stands, 411's exact area (0.500 ac?)
Septic designer	soil class at the emitters; drip area for 6 bedrooms on the chosen lot
Geotech	PVR and the foundation design for 46% clay
Utilities	M.E.N. WSC tap and membership fees; NCEC service cost
Title	easements, mineral reservations, TRWD flowage easement, liens
Agents	sold prices of canal lots, seller's disclosure, any survey, price flexibility

Method & limits

Desk study from public records — no site visit. Not a survey, appraisal, title opinion, septic design or legal advice. Lidar is ±0.5 ft; GIS lot lines can be several feet off. The largest-home figures come from a search over house rectangles inside the set-backs; the drip field must fit the rest of the lot. HOA set-backs in the CC&Rs (members-only) could be stricter than the county's. Zillow, Redfin, HAR and realtor.com block automated access, so realtor.com Fly Around views are replaced by lidar fly-arounds.

End note

Date of creation: 10 November 2026 · **Prepared by AI model:** Claude Opus 5.5 (Anthropic), working in Kiro · **Files:** The-Shores-3-Lots-Revised-Due-Diligence_10-Nov-26_Claude-Opus-5.5.pdf and The-Shores-3-Lots-Checklists-and-Emails_10-Nov-26_Claude-Opus-5.5.pdf Data and scripts: GitHub MMS-ITS/Corsicana_3lots (LOTSET=shores3).

Sources (read 8–10 Nov 2026)

- Navarro CAD property records 64391, 64288, 64390 + 11 neighbours (navarrocad.com); 2026 adopted rates and bills (texastaxtransparency.com)
- TxGIO StratMap 2026 parcels · USGS 3DEP 1 m lidar (TX 2022) · Esri World Imagery
- FEMA NFHL (FIRM 48349C0625D) · TWDB 2018 Richland-Chambers volumetric survey and daily lake levels · TWDB water-service areas
- USDA NRCS SSURGO (Crockett CrB)
- TRWD General Ordinance (Dec 2025), Attachment I and OSSF Guidelines (2026), 2026 fee schedule · TCEQ RG-472 (30 TAC 285)
- Navarro County Lakeshore Zoning Ordinance (2017, Table B) and 2025 permit package
- P.O.A. of The Shores: 2022 management certificate (Doc 2022-007945), 20th Supplement (6 Jun 2026), website
- LakeHouse.com listings (MLS 20810887, 21334950, 21407991) and Shores comparables; HAR, Redfin and realtor.com search snippets
- Earlier artifact: “3 Corsicana lakefront lots Comparison.pdf” (7 Nov 2026)

Glossary

BFE	base flood elevation, the 1%-chance flood level
Zone A / X	FEMA floodplain without a BFE / minimal hazard
CAD	Navarro Central Appraisal District (tax values)
TNT	Texas truth-in-taxation portal (adopted rates)
Circuit breaker (20% limit)	Tax Code §23.231: 20%/yr limit on non-homestead value increases, tax years 2024–2026 only; never passes to a buyer
TRWD	Tarrant Regional Water District — owns the lake, permits docks and septic
315 / 320 ft	normal pool / TRWD flood-flowage line (ft above sea level)
315 deed line	plat line that follows the 315-ft contour as surveyed at platting
OSSF / ATU	on-site sewage facility / aerobic treatment unit
Drip field	buried lines that spread treated effluent
Ra	septic loading rate, gal per sq ft per day (clay 0.10)
LEP	linear extensibility — clay shrink-swell; >6% is high
SF-3	county half-acre single-family zoning district
ACC	the POA's architectural control committee
PVR	potential vertical rise of clay under a slab
RPLS	Registered Professional Land Surveyor
Option period	paid right to cancel a Texas contract within a set number of days